

# UNITED FLEXIBLE

Composite Hose and Assemblies



CHEMICAL



HYDROCARBON



MARINE



CRYOGENIC



# UNITED FLE~~X~~IBLE

## Your one source for all your flexible requirements:

Metal, composite and fluoropolymer hose, tubing, bellows and assemblies

The strengths of five flexible fluid control companies — US Hose Corp., AmniTec Ltd, AmniTec BV, Habia Teknofluor AB and Fulton Bellows LLC — are being combined into a new company and new brand called United Flexible. United Flexible manufactures and markets a wide range of metallic braided, composite and fluoropolymer hose and tubing, precision bellows and engineered assemblies.

The new United Flexible reflects our commitment to provide you solutions expertise, high-quality products and the premier customer service you expect. With your input, we're continuing to broaden our portfolio of products and assemblies for your diverse applications needs. To meet your evolving needs, United Flexible brings you deep expertise in gas and fluid transfer applications, plus collaborative engineering resources and unique manufacturing processes.

To see the full breadth of our product and assembly capabilities, we invite you to visit our new website at [www.unitedflexible.com](http://www.unitedflexible.com). There you'll find new product catalogs and the widest range of flexible fluid transport solutions we've ever offered.

"Our Flexibility Is Your Strength."



John P. Devine  
Chief Executive  
United Flexible

## TABLE OF CONTENTS

Description	Page
United Flexible Composite Hose	4
Real Advantages For Your Applications	5
<b>1" to 4" Diameter Chemical Hose</b>	
Chemiflex® PGP949 200 psi Polypropylene	6
Chemiflex® PGP951 250 psi Polypropylene	7
Chemiflex® PSP951 250 psi Polypropylene	8
Chemiflex® SGP/SSP951 250 psi Polypropylene	9
Special Chemiflex® Fluoropolymer Chemical Hose SGF947/SSF947	10
High Temperature ThermMaster® GGF/SGF/SSF474	11
<b>1" to 4" Hydrocarbon Hose</b>	
Oilmaster® GGP901	12
Oilmaster® GGB901 - Bottom Loading Hose	13
Oilmaster® AAD944 - Ultra Lightweight Drop Hose	14
<b>4" to 10" Marine Hose</b>	
Chemiflex® GGV944, PGV944, SGV944 - Vapor Recovery	15
Oilmaster® GGP982 - Hydrocarbon & Chemiflex PGP998, PSP998 - Chemical	16
Chemiflex® SGP/SSP969 Chemical	17
Heavy Duty Special Chemiflex® Fluoropolymer Chemical Hose SGF/SSF969	18
<b>Cryogenic Hose</b>	
Cryoflex® GGY974 LPG Hose	19
Cryoflex® SSN940 NH3 Hose	20
Cryoflex® SSN933 LNG Hose	21
United Flexible End Connections	22
Inspections: Visual and Hydro-testing	23
Inspections: Electrical Continuity and Cleaning	24
Insulating Spool Flange	25
Hose Handling Guide	26
Chemical Resistant Charts	27-33
Notes	34-35
Contact Information	Back Cover

**Style designations** (see product for specific availability):

AA	Aluminum inner and outer wires
AG	Aluminum inner and galvanized outer wire
GG	Galvanized Steel inner and outer wires
PG	Polypropylene coated inner wire; Galvanized Steel outer wire
PP	Polypropylene coated Steel inner and outer wire
PS	Polypropylene coated inner wire; T316 Stainless Steel outer wire
SG	T316 Stainless Steel inner wire; Galvanized Steel outer wire
SS	T316 Stainless Steel inner and outer wires
XXP	above wire combinations with polypropylene linings
XXF	above wire combinations with PTFE barrier layers
XXV	above wire combinations for Vapor Recovery Applications
XXB	above wire combinations for Bottom Loading Applications
XXD	above wire combinations for Drop Hose Applications
XXN	above wire combinations with Nylon linings



The merging of TIFT-Compoflex® and Flextraco® into one “United Flexible” brand provides the marketplace...

### United Flexible Composite Hose

The point of transfer can be a vital link in the chain of production, distribution and use of bulk chemicals. For thousands of chemicals - for processing, transportation and bulk transfer applications, United Flexible composite hoses are built to exceed the critical requirements of chemical and fluid handling.

#### Construction Is Key

From inner bore to end connections, United Flexible composite hose products are engineered to deliver the optimum in chemical compatibility and on-the-job performance.

#### The Labyrinth Seal

Multiple, tightly-wound component layers create a very long and complex course for fluids. Over a century of manufacturing techniques assure the proper gauge and pitch of the inner and outer wires. The “labyrinth seal” is self-energized by the internal pressure of liquids and the action of all material components.

*The result is flexible composite hose...*that is seepage-free and leak-proof, that doesn't kink or collapse, that has great hoop strength, exceptional service life and offers superior safety and performance.

#### The “Barrier Layers”

United Flexible composite hoses are manufactured with multiple wraps of both polar and non-polar thermoplastic fabrics and films. These

thermoplastic films prevent permeation and effusion of both polar fluids (like toluene) and non-polar liquids (like gasoline).

*The result is composite hose...*with structural and cover layers that do not deteriorate due to chemical attack, that maintains maximum strength, flexibility and durability, and that is compatible with the widest range of chemicals.

#### Electrical Properties


Typically most hose assemblies have full end-to-end electrical continuity (10 ohms) achieved by bonding both inner and outer wires to the end connections. Assemblies are also available with specified electrical resistance or electrically discontinuous properties. For actual values, please contact United Flexible engineering department.

*The result is composite hose...*that prevents sparking and arc-over hazards and meets the electrical properties requirements of your application.

#### Externally swaged end connections

Each United Flexible end connection is specifically designed and manufactured to complement the unique construction and produce a perfect union with the hose. The ferrule and the tailpiece are permanently engaged by the external swage or crimp process.

*The result is...*hose and fittings designed to exceed rated burst pressure and assure 100% performance of the complete hose assembly.

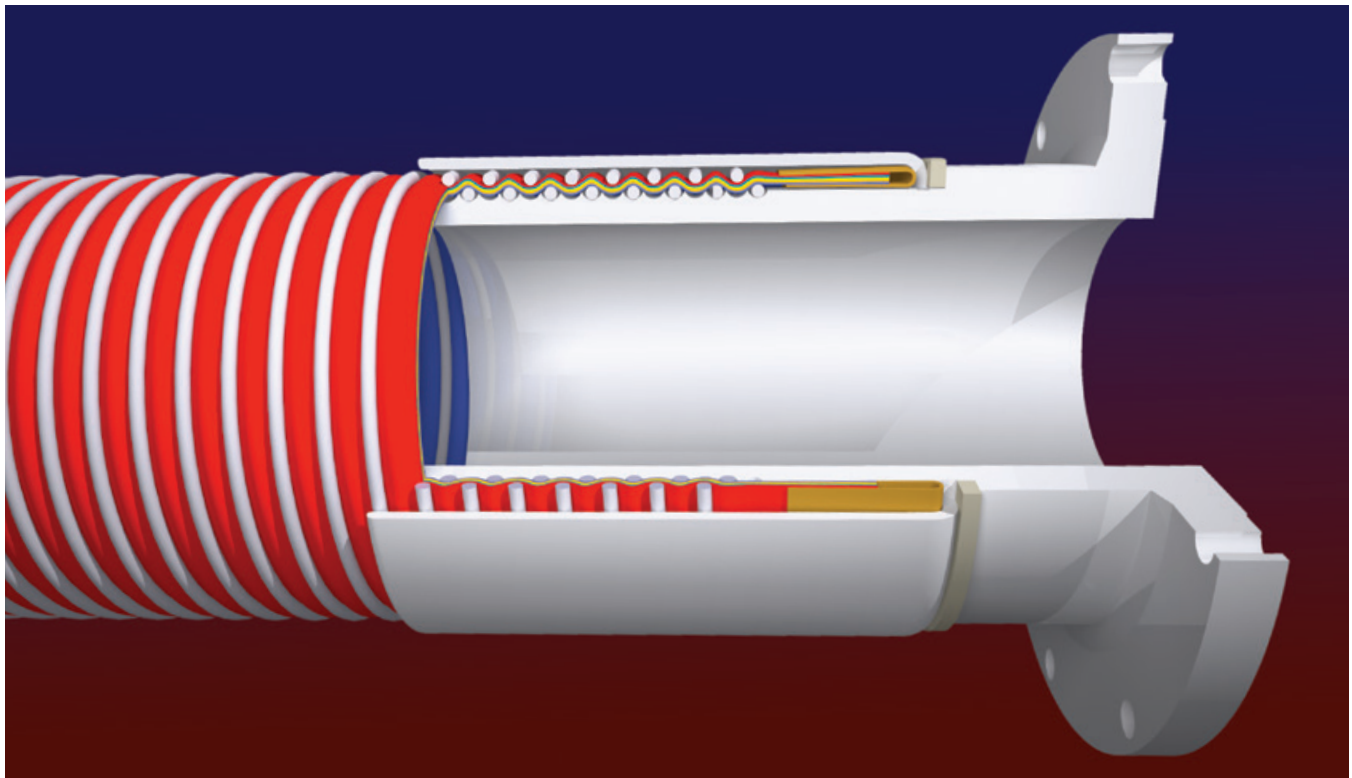

## Real Advantages For Your Applications

### Compared to rubber hose and metal hose


United Flexible composite hoses are light weight and flexible for user friendly handling. Their multi-layer construction prevents catastrophic failures. Flexibility is retained at low and even cryogenic temperatures. Hoses are protected from corrosion and attack by other liquids, UV and ozone by their tough, PVC Nylon impregnated outer covers.

### Engineered and Manufactured to High Standards

United Flexible composite hoses comply with various US and international standards including U.S.C.G, BS5842, EN13765:2010, EN13766:2010. Heavy duty hoses for ocean going vessels can be approved to IMO Codes, BCH and IBC requirements.

### From Acetaldehyde to Zinc Halides

And thousands of chemicals, liquids and compounds in between, United Flexible composite hoses are specifically designed to meet your most challenging transfer applications.

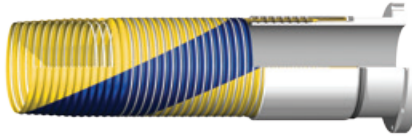

## Chemiflex® Polypropylene Chemical Hose

### Type PGP949

- Applications:** In-plant, tank truck, rail car liquid chemical suction and discharge.
- Construction:**
- Color/Cover: Yellow with a blue stripe/PVC coated Nylon, Abrasion, UV and Ozone resistant
  - Inner Wire: Black Polypropylene Coated Steel Wire
  - Inner lining: High Density Polypropylene
  - Carcass: Polypropylene fabrics, films
  - Outer Wire: Galvanized Steel
  - Additional Options: Special Color Coding and branding
- Physical properties:**
- Temperature Range: -22°F to +212°F (-30°C to +100°C)
  - Maximum elongation: ≤10% on test pressure
  - Vacuum range: 26 inHg (660 mmHg), 0.9 bar
  - Electrical properties: Electrically Conductive
  - ≤2.5 ohm/m for sizes less than 2"
  - ≤1.0 ohm/m for size 2" and above
- Standards:** EN13765:2010, Type 3, NAHAD-600:2005
- End Fittings:** Specially designed end fittings have been developed for use with United Flexible composite hoses that have a unique leak-proof sealing face and specially machined helical spiral shank which engages into the corresponding internal helix wire when secured into the hose by either crimping or swaging the external ferrules. See page 22 for more information about end connections.

#### TECHNICAL DATA: TYPE PGP949

Inside Diameter		Working Pressure		Min. Bend Radius		Approx Weight		Maximum Length	
Inches	mm	PSI	Bar	Inches	mm	lb/ft	kg/m	Feet	Meters
1	25	<b>200</b>	<b>14</b>	4	100	0.60	0.9	100	30
1½	40	<b>200</b>	<b>14</b>	5	125	0.80	1.20	100	30
2	50	<b>200</b>	<b>14</b>	7	175	1.20	1.80	100	30
3	80	<b>200</b>	<b>14</b>	8	200	2.00	3.00	100	30
4	100	<b>200</b>	<b>14</b>	12	300	2.7	4.1	100	30

Pressure based on safety factor 4:1


Dimensions and weight are approximate and are subject to change

For additional technical data such as pressure drop, max. flow rates and tensile strength, please consult United Flexible engineering

Increased operating temperatures will reduce working pressure of the assemblies

Fitting pressure rating may limit working pressure of the assembly

Rated working pressure is @ 70°F (21°C)

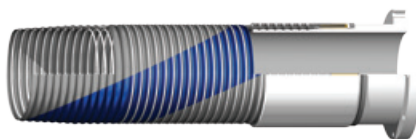

## Chemiflex® Heavy Duty Polypropylene Chemical Hose

### Type PGP951

- Applications:** This type is designed for use as a more robust chemical transfer service in heavy use truck and railcar loading, polypropylene coated steel wire and polypropylene inner liner for maximum chemical resistance
- Construction:**
- Color/Cover: Gray with a blue stripe/PVC coated Nylon, Abrasion, UV and Ozone resistant
  - Inner Wire: Black Polypropylene Coated Steel Wire
  - Inner lining: High Density Polypropylene
  - Carcass: Polypropylene fabrics, films
  - Outer Wire: Galvanized Steel
  - Additional Options: Special Color Coding and branding
- Physical properties:**
- Temperature Range: -22°F to +212°F (-30°C to +100°C)
  - Maximum elongation: ≤10% on test pressure
  - Vacuum range: 26 inHg (660 mmHg), 0.9 bar
  - Electrical properties: Electrically Conductive
  - ≤2.5 ohm/m for sizes less than 2"
  - ≤1.0 ohm/m for size 2" and above
- Standards:** BS5842, NAHAD-600:2005
- End Fittings:** Specially designed end fittings have been developed for use with United Flexible composite hoses that have a unique leak-proof sealing face and specially machined helical spiral shank which engages into the corresponding internal helix wire when secured into the hose by either crimping or swaging the external ferrules. See page 22 for more information about end connections.

#### TECHNICAL DATA: TYPE PGP951

Inside Diameter		Working Pressure		Min. Bend Radius		Approx Weight		Maximum Length	
Inches	mm	PSI	Bar	Inches	mm	lb/ft	kg/m	Feet	Meters
1	25	<b>250</b>	<b>17</b>	4	100	0.6	0.9	100	30
1¼	32	<b>250</b>	<b>17</b>	5	125	0.75	1.1	100	30
1½	40	<b>250</b>	<b>17</b>	5	125	1	1.5	100	30
2	50	<b>250</b>	<b>17</b>	6	150	1.5	2.2	100	30
2½	65	<b>250</b>	<b>17</b>	7	175	2.1	3.1	100	30
3	80	<b>250</b>	<b>17</b>	8	200	2.3	3.2	100	30
4	100	<b>200</b>	<b>14</b>	13	325	3	4.5	100	30

Pressure based on safety factor 4:1


Dimensions and weight are approximate and are subject to change

For additional technical data such as pressure drop, max. flow rates and tensile strength, please consult United Flexible engineering

Increased operating temperatures will reduce working pressure of the assemblies

Fitting pressure rating may limit working pressure of the assembly

Rated working pressure is @ 70°F (21°C)



## Chemiflex® Heavy Duty Polypropylene Chemical Hose

### Type PSP951

**Applications:** This type is designed for use as a transfer hose for corrosive acids and aggressive chemicals for tank trucks, railcar and plant transfer hose where a stainless steel outer wire is standard.

**Construction:**

Color/Cover:	Gray with a blue and white stripe/PVC coated Nylon, Abrasion, UV and Ozone resistant
Inner Wire:	Black Polypropylene Coated Steel Wire
Inner lining:	High Density Polypropylene
Carcass:	Polypropylene fabrics, films
Outer Wire:	Stainless Steel T304 or T316
Additional Options:	Special Color Coding and branding

**Physical properties:**

Temperature Range:	-22°F to +212°F (-30°C to +100°C)
Maximum elongation:	≤10% on test pressure
Vacuum range:	26 inHg (660 mmHg), 0.9 bar
Electrical properties:	Electrically Conductive
	≤2.5 ohm/m for sizes less than 2"
	≤1.0 ohm/m for size 2" and above

**Standards:** BS5842, NAHAD-600:2005

**End Fittings:** Specially designed end fittings have been developed for use with United Flexible composite hoses that have a unique leak-proof sealing face and specially machined helical spiral shank which engages into the corresponding internal helix wire when secured into the hose by either crimping or swaging the external ferrules. See page 22 for more information about end connections.

#### TECHNICAL DATA: TYPE PSP951

Inside Diameter		Working Pressure		Min. Bend Radius		Approx Weight		Maximum Length	
Inches	mm	PSI	Bar	Inches	mm	lb/ft	kg/m	Feet	Meters
1	25	<b>250</b>	<b>17</b>	4	100	0.6	0.9	100	30
1¼	32	<b>250</b>	<b>17</b>	5	125	0.75	1.1	100	30
1½	40	<b>250</b>	<b>17</b>	5	125	1	1.5	100	30
2	50	<b>250</b>	<b>17</b>	6	150	1.5	2.2	100	30
2½	65	<b>250</b>	<b>17</b>	7	175	2.1	3.1	100	30
3	80	<b>250</b>	<b>17</b>	8	200	2.3	3.2	100	30
4	100	<b>200</b>	<b>14</b>	13	325	3	4.5	100	30

Pressure based on safety factor 4:1

Dimensions and weight are approximate and are subject to change

For additional technical data such as pressure drop, max. flow rates and tensile strength, please consult United Flexible engineering

Increased operating temperatures will reduce working pressure of the assemblies

Fitting pressure rating may limit working pressure of the assembly

Rated working pressure is @ 70°F (21°C)





## Chemiflex® Heavy Duty Polypropylene Chemical Hose Type SGP951 and SSP951

- Applications:** This type is designed for use as a tank truck, railcar, and in plant transfer hose suitable for use with a wide variety of chemicals with a T316 stainless steel inner wire is standard.
- Construction:**
- Color/Cover: Gray blue stripe/PVC coated Nylon, Abrasion, Ozone resistant
  - Inner Wire: 316SS Stainless Steel Wire
  - Inner lining: High Density Polypropylene
  - Carcass: Polypropylene fabrics, films
  - Outer Wire: SGP951 Galvanized Steel  
SSP951 316SS Stainless Steel
  - Extra: Special Color Coding and branding
- Physical properties:**
- Temperature Range: -22°F to +212°F (-30°C to +100°C)
  - Maximum elongation: ≤10% on test pressure
  - Vacuum range: 26 inHg (660 mmHg), 0.9 bar
  - Electrical properties: Electrically Conductive  
≤2.5 ohm/m for sizes less than 2"  
≤1.0 ohm/m for size 2" and above
- Standards:** BS5842, NAHAD-600:2005
- End Fittings:** Specially designed end fittings have been developed for use with United Flexible composite hoses that have a unique leak-proof sealing face and specially machined helical spiral shank which engages into the corresponding internal helix wire when secured into the hose by either crimping or swaging the external ferrules. See page 22 for more information about end connections.

### TECHNICAL DATA: TYPE SGP951 AND SSP951

Inside Diameter		Working Pressure		Min. Bend Radius		Approx Weight		Maximum Length	
Inches	mm	PSI	Bar	Inches	mm	lb/ft	kg/m	Feet	Meters
1	25	<b>250</b>	<b>17</b>	4	100	0.6	0.9	100	30
1¼	32	<b>250</b>	<b>17</b>	5	125	0.75	1.1	100	30
1½	40	<b>250</b>	<b>17</b>	5	125	1	1.5	100	30
2	50	<b>250</b>	<b>17</b>	6	150	1.5	2.2	100	30
2½	65	<b>250</b>	<b>17</b>	7	175	2.1	3.1	100	30
3	80	<b>250</b>	<b>17</b>	8	200	2.3	3.2	100	30
4	100	<b>200</b>	<b>14</b>	13	325	3	4.5	100	30

Pressure based on safety factor 4:1



Dimensions and weight are approximate and are subject to change

For additional technical data such as pressure drop, max. flow rates and tensile strength, please consult United Flexible engineering

Increased operating temperatures will reduce working pressure of the assemblies

Fitting pressure rating may limit working pressure of the assembly

Rated working pressure is @ 70°F (21°C)

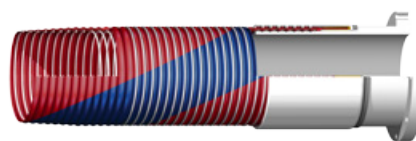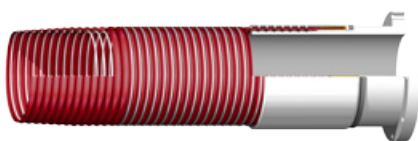

## Special Chemiflex® Fluoropolymer Chemical Hose

### Type SGF947 and SSF947

**Applications:** This type is designed for hazardous chemical where a fluoropolymer chemical resistant liner is required for tank truck, railcar, and in plant transfer hose suitable for use with a wide variety of chemicals

**Construction:**

Color/Cover:	SGF947 Red/PVC coated Nylon, Abrasion, Ozone resistant SSF947 Red blue stripe/PVC coated Nylon, Abrasion, Ozone resistant
Inner Wire:	T316 Stainless Steel Wire
Inner lining:	PFA, FEP, ECTFE
Carcass:	Polypropylene fabrics, films
Outer Wire:	SGF947 Galvanized Steel SSF947 T316 Stainless Steel
Extra:	Special Color Coding and branding

**Physical properties:**

Temperature Range:	-22°F to +212°F (-30°C to +100°C)
Maximum elongation:	≤10% on test pressure
Vacuum range:	26 inHg (660 mmHg), 0.9 bar
Electrical properties:	Electrically Conductive ≤2.5 ohm/m for sizes less than 2" ≤1.0 ohm/m for size 2" and above

**Standards:** BS5842, NAHAD-600:2005

**End Fittings:** Specially designed end fittings have been developed for use with United Flexible composite hoses that have a unique leak-proof sealing face and specially machined helical spiral shank which engages into the corresponding internal helix wire when secured into the hose by either crimping or swaging the external ferrules. See page 22 for more information about end connections.

#### TECHNICAL DATA: TYPE SGF947 AND SSF947

Inside Diameter		Working Pressure		Min. Bend Radius		Approx Weight		Maximum Length	
Inches	mm	PSI	Bar	Inches	mm	lb/ft	kg/m	Feet	Meters
1	25	<b>250</b>	<b>17</b>	4	100	0.60	1.00	100	30
1½	40	<b>250</b>	<b>17</b>	5	125	1.00	1.50	100	30
2	50	<b>250</b>	<b>17</b>	6	150	1.20	1.80	100	30
3	80	<b>250</b>	<b>17</b>	8	200	2.00	3.00	100	30
4	100	<b>250</b>	<b>17</b>	13	325	3.00	4.50	100	30

Pressure based on safety factor 4:1


Dimensions and weight are approximate and are subject to change

For additional technical data such as pressure drop, max. flow rates and tensile strength, please consult United Flexible engineering

Increased operating temperatures will reduce working pressure of the assemblies

Fitting pressure rating may limit working pressure of the assembly


Rated working pressure is @ 70°F (21°C)

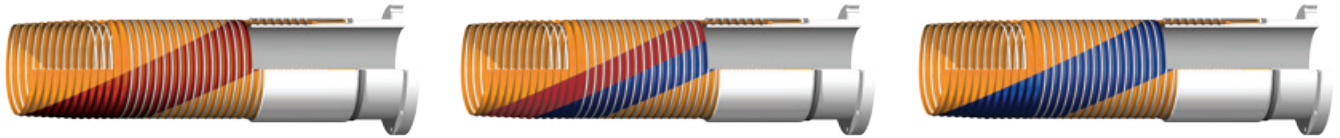

## High Temperature Fluoropolymer ThermMaster® Hose

### Type GGF474, SGF474, SSF474

<b>Applications:</b>	This type is especially designed for conveyants at higher temperatures using PTFE and non polypropylene polymeric materials. Suitable for molten sulphur, hot oils and chemicals up to 325 F/162C.		
<b>Construction:</b>	<b>Color/Cover:</b>	GGF474 Orange red stripe/PVC coated nylon, abrasion, ozone resistant SGF474 Orange red & blue stripe/PVC coated Nylon, Abrasion, Ozone resistant SSF474 Orange & blue stripe/PVC coated Nylon, Abrasion, Ozone resistant	
	<b>Inner Wire:</b>	T316 Stainless Steel Wire	
	<b>Inner lining:</b>	PFA, FEP, ETFE	
	<b>Carcass:</b>	Heat Resistant Polymeric Fabrics and Films and PTFE Linings are standard	
	<b>Outer Wire:</b>	GGF474 & SGF474 Galvanized Steel SSF474 T316 Stainless Steel	
<b>Physical properties:</b>	<b>Temperature Range:</b>	-22°F to +325°F (-30°C to +162°C)	
	<b>Vacuum range:</b>	26 inHg (660 mmHg), 0.9 bar	

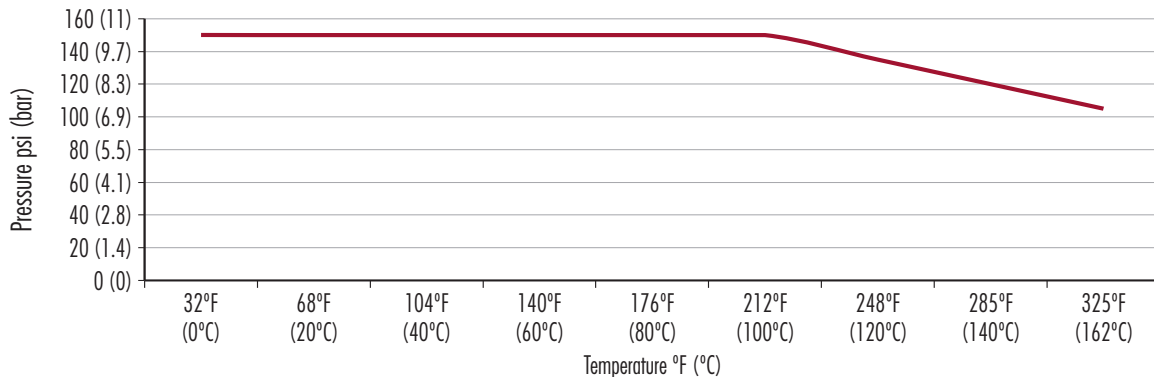

**Standard:** EN13765 Type 4

**End Fittings:** Specially designed end fittings have been developed for use with United Flexible composite hoses that have a unique leak-proof sealing face and specially machined helical spiral shank which engages into the corresponding internal helix wire when secured into the hose by either crimping or swaging the external ferrules. See page 22 for more information about end connections.

TECHNICAL DATA: TYPE GGF474, SGF474 AND SSF474									
Inside Diameter		Working Pressure		Min. Bend Radius		Approx Weight		Maximum Length	
Inches	mm	PSI	Bar	Inches	mm	lb/ft	kg/m	Feet	Meters
1	25	<b>150</b>	<b>10</b>	4	100	0.65	1.00	100	30
1½	40	<b>150</b>	<b>10</b>	5.0	125	1	1.50	100	30
2	50	<b>150</b>	<b>10</b>	6.0	150	1.20	1.80	100	30
3	80	<b>150</b>	<b>10</b>	8	200	2.00	3.00	100	30
4	100	<b>150</b>	<b>10</b>	13	325	3.00	4.50	100	30

Pressure based on safety factor 4:1


Dimensions and weight are approximate and are subject to change

For additional technical data such as pressure drop, max. flow rates and tensile strength, please consult United Flexible engineering

Increased operating temperatures will reduce working pressure of the assemblies

Fitting pressure rating may limit working pressure of the assembly

Rated working pressure is @ 70°F (21°C)

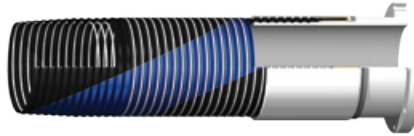

## Oilmaster® Polypropylene Hydrocarbon Hose

### Type GGP901

**Applications:** This type is specially designed for the robust transfer of all lube oils, petrol, diesel (solar) and distillates.

**Construction:**

Color/Cover:	Black with a blue stripe/PVC coated Nylon, Abrasion, UV and Ozone resistant
Inner Wire:	Galvanized Steel
Inner lining:	High Density Polypropylene
Carcass:	Polypropylene fabrics, films
Outer Wire:	Galvanized Steel
Extra:	Special Color Coding and branding

**Physical properties:**

Temperature Range:	-22°F to +212°F (-30°C to +100°C)
Maximum elongation:	≤10% on test pressure
Vacuum range:	26 inHg (660 mmHg), 0.9 bar
Electrical properties:	Electrically Conductive
	≤2.5 ohm/m for sizes less than 2"
	≤1.0 ohm/m for size 2" and above

**Standards:** BS5842, NAHAD-600:2005

**End Fittings:** Specially designed end fittings have been developed for use with United Flexible composite hoses that have a unique leak-proof sealing face and specially machined helical spiral shank which engages into the corresponding internal helix wire when secured into the hose by either crimping or swaging the external ferrules. See page 22 for more information about end connections.

**TECHNICAL DATA: TYPE GGP901**

Inside Diameter		Working Pressure		Min. Bend Radius		Approx Weight		Maximum Length	
Inches	mm	PSI	Bar	Inches	mm	lb/ft	kg/m	Feet	Meters
1	25	<b>250</b>	<b>17</b>	4	100	0.65	1.00	100	30
1½	40	<b>250</b>	<b>17</b>	5	125	1	1.50	100	30
2	50	<b>250</b>	<b>17</b>	6	150	1.20	1.80	100	30
2½	65	<b>250</b>	<b>17</b>	7	175	2.1	3.1	100	30
3	80	<b>250</b>	<b>17</b>	8	200	2.00	3.00	100	30
4	100	<b>200</b>	<b>14</b>	13	325	3.00	4.50	100	30

Pressure based on safety factor 4:1

Dimensions and weight are approximate and are subject to change


For additional technical data such as pressure drop, max. flow rates and tensile strength, please consult United Flexible engineering

Increased operating temperatures will reduce working pressure of the assemblies

Fitting pressure rating may limit or reduce the rated working pressure of the assembly

Rated working pressure is @ 70°F (21°C)



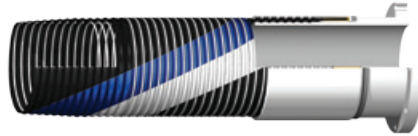

## Oilmaster® Bottom Loading Hose

### Type GGB901

- Applications:** This type is designed exclusively for the bottom loading arm application for filling tank trucks suitable for all grades and blends of refined gasoline products with unique fiberglass flame resistant layer.
- Construction:**
- Color/Cover: Black with a blue and white stripe/PVC coated Nylon, Abrasion, UV and Ozone resistant
  - Inner Wire: Galvanized Steel
  - Inner lining: High Density Polypropylene
  - Carcass: Fiberglass Flame-Resistant layer, Polypropylene fabrics and Nylon films
  - Outer Wire: Galvanized Steel
- Physical properties:**
- Temperature Range: -22°F to +212°F (-30°C to +100°C)
  - Maximum elongation: ≤10% on test pressure
  - Vacuum range: 26 inHg (660 mmHg), 0.9 bar
  - Electrical properties: Electrically Conductive  
≤1.0 ohm/m
- Standards:** BS5842, NAHAD-600:2005
- End Fittings:** Specially designed end fittings have been developed for use with United Flexible composite hoses that have a unique leak-proof sealing face and specially machined helical spiral shank which engages into the corresponding internal helix wire when secured into the hose by either crimping or swaging the external ferrules. See page 22 for more information about end connections.
- Lengths:** For GGB901 Bottom Loading Hose measure the lengths as either “pressurized” or “empty”. The effect of elongation must be calculated in order to produce the correctly manufactured length and price.

TECHNICAL DATA: TYPE GGB901									
Inside Diameter		Working Pressure		Min. Bend Radius		Approx Weight		Maximum Length	
Inches	mm	PSI	Bar	Inches	mm	lb/ft	kg/m	Feet	Meters
3	80	<b>200</b>	<b>14</b>	9.50	240	2.00	3.00	100	30
4	100	<b>200</b>	<b>14</b>	14.50	360	3.00	4.50	100	30

Pressure based on safety factor 4:1


Dimensions and weight are approximate and are subject to change

For additional technical data such as pressure drop, max. flow rates and tensile strength, please consult United Flexible engineering

Increased operating temperatures will reduce working pressure of the assemblies

Fitting pressure rating may limit or reduce the rated working pressure of the assembly

Rated working pressure is @ 70°F (21°C)



## Ultra Lightweight Polypropylene Drop Hose

### Type AAD 944020

**Applications:** This type is designed for use as a drop hose in tank truck, railcar and inplant applications where an aluminum inner wire is standard. With optional aluminum or galvanized steel wire (for improved crush resistance).

**Construction:**

Color/Cover:	Orange/PVC coated Nylon, Abrasion, UV and Ozone resistant
Inner Wire:	Aluminum #5052
Inner lining:	High Density Polypropylene
Carcass:	Polypropylene fabrics and Nylon films
Outer Wire:	AAD Aluminum #5052 AGD Galvanized Steel

**Physical properties:**

Temperature Range:	-22°F to +180°F (-30°C to +80°C)
Maximum elongation:	≤10% on test pressure
Vacuum range:	26 inHg (660 mmHg), 0.9 bar
Electrical properties:	Electrically Conductive ≤2.5 ohm/m for sizes less than 2" ≤1.0 ohm/m for size 2" and above

**Standards:** USCG, BS5842, NAHAD-600:2005

**End Fittings:** Fittings are designed with a specially machined helical shank which enables it to be screwed into the matching internal helix wire. The external ferrule can be either crimped or swaged.

#### TECHNICAL DATA: TYPE AAD 944020

Inside Diameter		Working Pressure		Min. Bend Radius		Approx Weight		Maximum Length	
Inches	mm	PSI	Bar	Inches	mm	lb/ft	kg/m	Feet	Meters
1	25	<b>100</b>	<b>7</b>	4	100	0.3	0.4	100	30
1½	40	<b>100</b>	<b>7</b>	5.25	130	0.5	0.7	100	30
2	50	<b>100</b>	<b>7</b>	6.25	165	0.7	1	100	30
3	80	<b>100</b>	<b>7</b>	7	180	1.5	1.1	100	30
4	100	<b>100</b>	<b>7</b>	10	250	1.8	1.4	100	30

Pressure based on safety factor 4:1


Dimensions and weight are approximate and are subject to change

For additional technical data such as pressure drop, max. flow rates and tensile strength, please consult United Flexible engineering

Increased operating temperatures will reduce working pressure of the assemblies

Fitting pressure rating may limit working pressure of the assembly

Rated working pressure is @ 70°F (21°C)

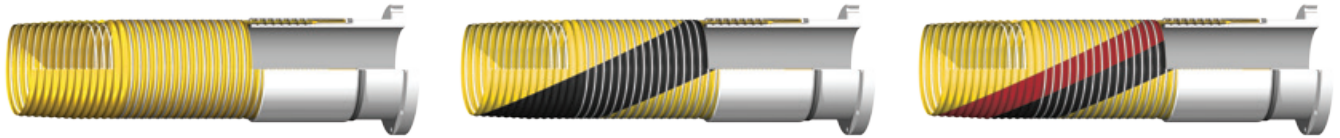

## Chemiflex® Vapor Recovery Polypropylene Hose

### Type GGV, PGV, SGV 944

#### Applications:

This type is designed for use at tank truck, rail car and marine terminals in ship-to-shore applications for vapor recovery of oils and chemicals. Widely used for it's high flexibility and robustness, this hose sets the standard.

#### Construction:

**Color/Cover:** GGV Yellow/PVC coated Nylon, Abrasion, UV and Ozone resistant  
PGV Yellow black stripe/PVC coated Nylon, Abrasion and Ozone resistant  
SGV Yellow black and red stripe/PVC coated Nylon, Abrasion and Ozone resistant

**Inner Wire:** GGV Galvanized Steel  
PGV Black Polypropylene coated steel  
SGV T316 Stainless Steel

**Inner lining:** High Density Polypropylene

**Carcass:** Polypropylene fabrics, films

**Outer Wire:** Galvanized Steel

#### Physical properties:

**Temperature Range:** -22°F to +180°F (-30°C to +80°C)

**Maximum elongation:** ≤10% on test pressure

**Vacuum range:** 26 inHg (660 mmHg), 0.9 bar

**Electrical properties:** Electrically Conductive  
≤2.5 ohm/m for sizes less than 2"  
≤1.0 ohm/m for size 2" and above

#### Standards:

EN13765:2010, Type 2, USCF, 33CFR Section 154.810, BS5842, NAHAD-600:2005

#### End Fittings:

Specially designed end fittings have been developed for use with United Flexible composite hoses that have a unique leak-proof sealing face and specially machined helical spiral shank which engages into the corresponding internal helix wire when secured into the hose by either crimping or swaging the external ferrules. See page 22 for more information about end connections.

#### TECHNICAL DATA: TYPE GGV, PGV, SGV 944

Inside Diameter		Working Pressure		Min. Bend Radius		Approx Weight		Maximum Length	
Inches	mm	PSI	Bar	Inches	mm	lb/ft	kg/m	Feet	Meters
1	25	<b>100</b>	<b>7</b>	4	100	0.65	1.00	100	30
1½	40	<b>100</b>	<b>7</b>	5	125	1	1.50	100	30
2	50	<b>100</b>	<b>7</b>	6	150	1.20	1.80	100	30
3	80	<b>100</b>	<b>7</b>	8	200	1.80	2.70	100	30
4	100	<b>100</b>	<b>7</b>	11	280	2.55	3.8	100	30
6	150	<b>100</b>	<b>7</b>	16	410	3.6	5.3	100	30
8	200	<b>100</b>	<b>7</b>	22	560	8.08	11.9	100	30
10	250	<b>100</b>	<b>7</b>	30	760	10.35	15.3	50	15

Pressure based on safety factor 4:1

Dimensions and weight are approximate and are subject to change

For additional technical data such as pressure drop, max. flow rates and tensile strength, please consult United Flexible engineering

Increased operating temperatures will reduce working pressure of the assemblies

Fitting pressure rating may limit working pressure of the assembly

Rated working pressure is @ 70°F (21°C)



## Oilmaster® Polypropylene Hydrocarbon Hose and Chemiflex® Polypropylene Chemical Hose

### Type GGP982, PGP998 & PSP998

- Applications:** This hose is specifically designed as a bulk liquid transfer hose from barges, ships and ocean-going vessels for all hydrocarbons and chemicals.
- Construction:**
- Color/Cover: GGP982 Dark Blue with a blue stripe/Double PVC coated Nylon, Abrasion, UV and Ozone resistant  
PGP998 & PSP998 Gray with a blue stripe/Double PVC coated Nylon, Abrasion, UV and Ozone resistant
  - Inner Wire: GGP982 Galvanized Steel  
PGP998 Black Polypropylene coated steel
  - Inner lining: High Density Polypropylene
  - Carcass: Polypropylene fabrics, films and Polypropylene/Nylon
  - Outer Wire: GGP982 & PGP998 Galvanized Steel  
PSP998 Stainless Steel
  - Logo: Oilmaster® or Chemiflex®
- Physical properties:**
- Temperature Range: -22°F to +212°F (-30°C to +100°C)
  - Maximum elongation: ≤10% on test pressure
  - Vacuum range: 26 inHg (660 mmHg), 0.9 bar
  - Electrical properties: Electrically Conductive  
≤1.0 ohm/m
- Standards:** EN13765 Type 3, BS5842, USCG 33CFR 154.500
- Approvals:** Bureau Veritas and Nippon Kaiji Kyokai Type Approval to IBC & BCH codes of IMO Resolutions for carrying dangerous chemicals in bulk at sea.
- End Fittings:** Specially designed end fittings have been developed for use with United Flexible composite hoses that have a unique leak-proof sealing face and specially machined helical spiral shank which engages into the corresponding internal helix wire when secured into the hose by either crimping or swaging the external ferrules. See page 22 for more information about end connections.

#### TECHNICAL DATA: TYPE GGP982, PGP998 AND PSP998

Inside Diameter		Working Pressure		Min. Bend Radius		Approx Weight		Maximum Length	
Inches	mm	PSI	Bar	Inches	mm	lb/ft	kg/m	Feet	Meters
4	100	<b>200</b>	<b>14</b>	16	400	5.3	7.9	100	30
6	150	<b>200</b>	<b>14</b>	20	500	7.4	11	100	30
8	200	<b>200</b>	<b>14</b>	29	740	12	18	100	30
10	250	<b>150</b>	<b>10</b>	36	920	14	20.9	40	12

Pressure based on safety factor 4:1

Dimensions and weight are approximate and are subject to change

For additional technical data such as pressure drop, max. flow rates and tensile strength, please consult United Flexible engineering

Increased operating temperatures will reduce working pressure of the assemblies

Fitting pressure rating may limit or reduce the rated working pressure of the assembly

Rated working pressure is @ 70°F (21°C)





## Chemiflex® Polypropylene Chemical Hose

### Type SGP969 and SSP969

<b>Applications:</b>	This hose is specifically designed as a bulk liquid transfer hose from barges,ships and ocean going vessels for all chemicals.		
<b>Construction:</b>	Color/Cover:	SGP969 Aqua Green with a blue stripe/2x PVC coated Nylon, Abrasion and Ozone resistant SSP969 Aqua green with a double blue stripe/2xPVC coated Nylon, Abrasion, and Ozone resistant	
	Inner Wire:	T316 Stainless Steel	
	Inner lining:	High Density Polypropylene	
	Carcass:	Polypropylene fabrics, films and Polypropylene/Nylon	
	Outer Wire:	SGP969 Galvanized Steel SSP969 T316 Stainless Steel	
	Logo:	Chemiflex®	
<b>Physical properties:</b>	Temperature Range:	-22°F to +212°F (-30°C to +100°C)	
	Maximum elongation:	≤10% on test pressure	
	Vacuum range:	26 inHg (660 mmHg), 0.9 bar	
	Electrical properties:	Electrically Conductive ≤1.0 ohm/m	
<b>Standards:</b>	BS5842, USCG 33CFR 154.500		
<b>Approvals:</b>	Bureau Veritas and Nippon Kaiji Kyokai Type Approval to IBC & BCH codes of IMO Resolutions for carrying dangerous chemicals in bulk at sea.		
<b>End Fittings:</b>	Specially designed end fittings have been developed for use with United Flexible composite hoses that have a unique leak-proof sealing face and specially machined helical spiral shank which engages into the corresponding internal helix wire when secured into the hose by either crimping or swaging the external ferrules. See page 22 for more information about end connections.		

#### TECHNICAL DATA: TYPE SGP969 AND SSP969

Inside Diameter		Working Pressure		Min. Bend Radius		Approx Weight		Maximum Length	
Inches	mm	PSI	Bar	Inches	mm	lb/ft	kg/m	Feet	Meters
4	100	<b>200</b>	<b>14</b>	16	400	5.3	7.9	100	30
6	150	<b>200</b>	<b>14</b>	20	500	7.4	11	100	30
8	200	<b>200</b>	<b>14</b>	29	740	12	18	100	30
10	250	<b>150</b>	<b>10</b>	36	920	14	20.9	40	12

Pressure based on safety factor 4:1



Dimensions and weight are approximate and are subject to change

For additional technical data such as pressure drop, max. flow rates and tensile strength, please consult United Flexible engineering

Increased operating temperatures will reduce working pressure of the assemblies

Fitting pressure rating may limit or reduce the rated working pressure of the assembly

Rated working pressure is @ 70°F (21°C)

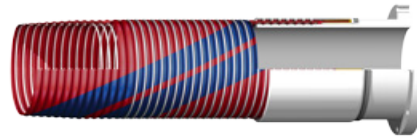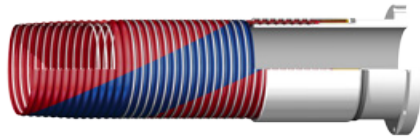

## Heavy Duty Special Chemiflex® Fluoropolymer Chemical Hose

### Type: SGF969 and SSF969

**Applications:** This hose is specifically designed as a bulk liquid transfer hose from barges, ships and ocean going vessels for all aggressive chemicals where a fluoropolymer liner is standard.

**Construction:**

Color/Cover:	SGF969 Red with a blue stripe/2x PVC coated Nylon, Abrasion, UV and Ozone resistant SSF969 Red with a double blue stripe/2xPVC coated Nylon, Abrasion and Ozone resistant
Inner Wire:	Galvanized Steel T316 Stainless Steel
Inner lining:	PTFE, PFA, FEP, ECTFE
Carcass:	Polypropylene fabrics, films and Polypropylene/Nylon
Outer Wire:	304 Stainless Steel (T316 Stainless Steel available)
Logo:	Special Chemiflex®

**Physical properties:**

Temperature Range:	-22°F to +212°F (-30°C to +100°C)
Maximum elongation:	≤10% on test pressure
Vacuum range:	26 inHg (660 mmHg), 0.9 bar
Electrical properties:	Electrically Conductive ≤1.0 ohm/m

**Standards:** EN13765 Type 3, BS5842, USCG 33CFR 154.500

**Approvals:** Bureau Veritas and Nippon Kaiji Kyokai Type Approval to IBC & BCH codes of IMO Resolutions for carrying dangerous chemicals in bulk at sea.

**End Fittings:** Specially designed end fittings have been developed for use with United Flexible composite hoses that have a unique leak-proof sealing face and specially machined helical spiral shank which engages into the corresponding internal helix wire when secured into the hose by either crimping or swaging the external ferrules. See page 22 for more information about end connections.

#### TECHNICAL DATA: SGF969 AND SSF969

Inside Diameter		Working Pressure		Min. Bend Radius		Approx Weight		Maximum Length	
Inches	mm	PSI	Bar	Inches	mm	lb/ft	kg/m	Feet	Meters
4	100	<b>200</b>	<b>14</b>	16	400	5.3	7.9	100	30
6	150	<b>200</b>	<b>14</b>	20	500	7.4	11	100	30
8	200	<b>200</b>	<b>14</b>	29	740	12	18	100	30
10	250	<b>150</b>	<b>10</b>	36	920	14	20.9	40	12

Pressure based on safety factor 4:1


Dimensions and weight are approximate and are subject to change

For additional technical data such as pressure drop, max. flow rates and tensile strength, please consult United Flexible engineering

Increased operating temperatures will reduce working pressure of the assemblies

Fitting pressure rating may limit or reduce the rated working pressure of the assembly

Rated working pressure is @ 70°F (21°C)



## Cryoflex® 20 LPG Hose

### Type GGY974

- Applications:** This hose is specifically designed for use with liquid propane (LPG).
- Construction:**
- Color/Cover: White w/yellow stripe, Nylon, Abrasion, UV and Ozone resistant
  - Inner Wire: Galvanized Steel
  - Inner lining: Polyester
  - Carcass: Polyester fabrics and films
  - Outer Wire: High tensile galvanized steel wire
- Physical properties:**
- Temperature Range: -20°F to +275°F (-30°C to +135°C)
  - Maximum elongation: ≤10% on test pressure
  - Vacuum range: 26 inHg (660 mmHg), 0.9 bar
  - Electrical properties: Electrically Conductive  
≤1.0 ohm/m
- Standards:** CSA 8:1 M86-CAN/C9A Type 1 and USCG 33 CFR Section 127.1102
- Approvals:** Canadian Standards Authority CSA 8:1 M86-CAN/9A Type 1. CSA applicable through 2" diameter only. CRN Approvals based on standard end fitting configurations are available.
- End Fittings:** Specially designed end fittings have been developed for use with United Flexible composite hoses that have a unique leak-proof sealing face and specially machined helical spiral shank which engages into the corresponding internal helix wire when secured into the hose by either crimping or swaging the external ferrules. See page 22 for more information about end connections.

#### TECHNICAL DATA: TYPE GGY974

Inside Diameter		Working Pressure		Min. Bend Radius		Approx Weight		Maximum Length	
Inches	mm	PSI	Bar	Inches	mm	lb/ft	kg/m	Feet	Meters
1	25	<b>350</b>	<b>25</b>	3.0	75	0.3	0.14	100	30
1½	40	<b>350</b>	<b>25</b>	4.0	100	0.8	0.36	100	30
2	50	<b>350</b>	<b>25</b>	5.5	140	1.3	2.0	100	30
3	80	<b>350</b>	<b>25</b>	8.0	200	2.0	3.0	100	30

Pressure based on safety factor 5:1

Dimensions and weight are approximate and are subject to change


For additional technical data such as pressure drop, max. flow rates and tensile strength, please consult United Flexible engineering

Increased operating temperatures will reduce working pressure of the assemblies

Fitting pressure rating may limit or reduce the rated working pressure of the assembly

Rated working pressure is @ 70°F (21°C)

3" Diameter Hose is not covered by the requirements of CSA 8:1 M86-CAN/C9A Type 1



## Cryoflex® 50 Hose

### Type SSN940

#### Applications:

This type is designed for use the safe transfer of fully refrigerated conveyants in road and railcar, in plant and ship-to-shore or ship-to-ship transfer applications including the following Acetaldehyde, Ammonia (anhydrous), Butadiene, Butane/Propane, Butylene, Ethylamine, Ethylamine, Polypropylene, Refrigerant Gasses, Vinyl Chloride.

Also suitable for Liquid Ethane to -128°F (-89°C), Liquid Ethylene to -157°F (-105°C) and Liquid CO<sub>2</sub>.

#### Construction:

Color/Cover: White green stripe/Nylon (rope lagging for extra protection and insulation available)  
 Inner Wire: T316 Stainless Steel  
 Inner lining: Nylon  
 Carcass: Polyamide, Nylon fabrics and Polyamide films  
 Outer Wire: T316 Stainless Steel  
 Logo: Cryoflex® 50

#### Physical properties:

Temperature Range: -128°F to +150°F (-88°C to +66°C)  
 Maximum elongation: ≤10% on test pressure  
 Vacuum range: 26 inHg (660 mmHg), 0.9 bar  
 Electrical properties: Electrically Conductive  
 ≤1.0 ohm/m for size 2" and above

#### Standards:

EN13766:2010, USCG 33CFR 127.1102

#### Approvals:

Bureau Veritas Type Approval for IGC & IBV Code and relevant requirements of the Society for handling Propane, Propylene, Butylene, Butane, Anhydrous Ammonia and Vinyl Chloride for 4" to 8" diameter hose.

#### End Fittings:

Specially designed end fittings have been developed for use with United Flexible composite hoses that have a unique leak-proof sealing face and specially machined helical spiral shank which engages into the corresponding internal helix wire when secured into the hose by either crimping or swaging the external ferrules. See page 22 for more information about end connections.

**TECHNICAL DATA: TYPE SSN940**

Inside Diameter		Working Pressure		Min. Bend Radius		Approx Weight		Maximum Length	
Inches	mm	PSI	Bar	Inches	mm	lb/ft	kg/m	Feet	Meters
1	25	<b>350</b>	<b>25</b>	6.0	150	0.6	0.9	100	30
1½	40	<b>350</b>	<b>25</b>	7.0	175	1.1	1.6	100	30
2	50	<b>350</b>	<b>25</b>	8.0	200	1.6	2.4	100	30
3	80	<b>350</b>	<b>25</b>	10.0	250	3.0	4.5	100	30
4	100	<b>350</b>	<b>25</b>	20.0	500	5.0	7.5	100	30
6	150	<b>350</b>	<b>25</b>	26.0	650	9.3	14.0	65	20
8	200	<b>350</b>	<b>25</b>	36.0	900	12.5	18.8	65	20
10	250	<b>200</b>	<b>14</b>	59	1500	15.1	22.3	50	15

Pressure based on safety factor 5:1

Dimensions and weight are approximate and are subject to change


For additional technical data such as pressure drop, max. flow rates and tensile strength, please consult United Flexible engineering

Increased operating temperatures will reduce working pressure of the assemblies

Fitting pressure rating may limit or reduce the rated working pressure of the assembly

Rated working pressure is @ 70°F (21°C)





## Cryoflex® 200 Cryogenic Hose

### Type SSN933

#### Applications:

This type is designed for use the safe transfer of fully refrigerated conveyants down to  $-321^{\circ}\text{F}$  ( $-196^{\circ}\text{C}$ ) in road and railcar, in plant and ship-to-shore or ship-to-ship transfer applications including the following LNG Acetaldehyde, Ammonia (anhydrous), Butadiene, Butane/Propane, Butylene, Ethylamine, Ethylamine, Polypropylene, Refrigerant Gasses, Vinyl Chloride.

#### Construction:

Color/Cover: White Nylon (rope lagging for extra protection and insulation available)  
 Inner Wire: T316 Stainless Steel  
 Inner lining: High Density Nylon  
 Carcass: Polyamide, Nylon fabrics and BOPP films  
 Outer Wire: T316 Stainless Steel  
 Logo: Cryoflex® 200

#### Physical properties:

Temperature Range:  $-321^{\circ}\text{F}$  to  $+122^{\circ}\text{F}$  ( $-196^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$ )  
 Maximum elongation:  $\leq 10\%$  on test pressure  
 Vacuum range: 26 inHg (660 mmHg), 0.9 bar  
 Electrical properties: Electrically Conductive  
 $\leq 1.0 \text{ ohm/m}$

#### Standards:

EN13766:2010, USCG 33CFR 127.1102

#### End Fittings:

Specially designed end fittings have been developed for use with United Flexible composite hoses that have a unique leak-proof sealing face and specially machined helical spiral shank which engages into the corresponding internal helix wire when secured into the hose by either crimping or swaging the external ferrules. See page 22 for more information about end connections.

#### TECHNICAL DATA: TYPE SSN933

Inside Diameter		Working Pressure		Min. Bend Radius		Approx Weight		Maximum Length	
Inches	mm	PSI	Bar	Inches	mm	lb/ft	kg/m	Feet	Meters
1	25	<b>150</b>	<b>10</b>	6.0	150	0.6	0.9	100	30
1½	40	<b>150</b>	<b>10</b>	7.0	175	1.1	1.6	100	30
2	50	<b>150</b>	<b>10</b>	7.5	185	1.55	2.3	100	30
3	80	<b>150</b>	<b>10</b>	11	280	2.95	4.4	100	30
4	100	<b>150</b>	<b>10</b>	20.0	500	4.95	1.3	65	20
6	150	<b>150</b>	<b>10</b>	26.0	660	9.45	14.0	65	20
8	200	<b>150</b>	<b>10</b>	37	940	12.75	18.9	65	20
10	250	<b>150</b>	<b>10</b>	59	1500	15.1	23	50	15

Pressure based on safety factor 5:1

Dimensions and weight are approximate and are subject to change

For additional technical data such as pressure drop, max. flow rates and tensile strength, please consult United Flexible engineering

Increased operating temperatures will reduce working pressure of the assemblies

Fitting pressure rating may limit or reduce the rated working pressure of the assembly

Rated working pressure is @  $70^{\circ}\text{F}$  ( $21^{\circ}\text{C}$ )

## Hose Couplings, Adapters and Accessories



### Fitting Styles:

Victaulic grooved tailpiece (12), Threaded tailpiece (13,16,10,3,4,6), Polypropylene ANSI drilled flanged tailpiece with steel backing ring (14,8), Aluminum female coupler tailpiece (15), Floating or swivel ANSI flange on a stub end tailpiece (11), Metallic ANSI RF fixed flange tailpiece (9), Self locking arm female coupler tailpiece (1,2), Quick disconnect male adapter tailpiece (5), Sanitary tailpiece (7)

### Fittings:

All fittings are designed assure 100% performance by each hose. Attachment methods are specifically developed for a perfect union and ensure performance up to rated burst pressure.

### Double start threads, scrolls or serrations:

Double start threads, scrolls or serrations engage the inner wire and ensure positive location of the outer wire after swaging. Precise machining assures maintenance of hose film pack and wire integrity.

### Raised sealing face:

Raised sealing face is vital to a leakproof connection. Our external swage or crimp processes assures that the hose is permanently engaged and sealed to the fitting.

### Comprehensive range of fittings available:

Threaded or flanged stock connections, designed to current US and international standards. Fixed (weldneck or slip on) and swivel flanges to ANSI Class 150, 300 or DIN PN 10/16 or JIS 10K flanges are available. Proprietary quick release female couplers with self locking arms are available with male cam adapters. Sanitary fittings in both T316 Stainless Steel or polypropylene are available. With the ability to offer custom fittings designed for particular applications and compatibility requirements.

### Materials:

Carbon steel, Stainless Steel (T316 and T304), Brass, Aluminum, Hastelloy C-276, polypropylene and kynar are available.

### Slings:

Recommended for support in heavy dock and barge service. Full range of slings are warehoused and readily available.

### Suff guard:

To protect hose from excessive abrasion in dockside and terminal operations. Available in 60-ft (18 meter) coils and can be cut, banded and clamped to hose.

## Inspection, Testing and Maintenance

### Inspection, testing and cleaning United Flexible Hoses



**Visual inspection** – check hoses before each operation and before conducting hydraulic tests...

**Hoses and hoses with rope lagging should be given a brief visual examination before each operation and a more thorough visual inspection at periods not exceeding six months. The inspection should pay attention to:**

- » Tears and abrasion of the hose cover or in the rope.
- » Dents or kicks.
- » Displacement of the hose reinforcing wires from their normal pitch or displacement of the rope exposing the hose below.
- » Corrosion or abrasion of the hose outer wire.
- » Signs of displacement of the end fittings or evidence of leakage at the ends.
- » Any other abnormal features, including wear or damage to the end fittings.



**Hydrostatic testing** – annually or more frequently...

**At periods not exceeding one year hoses should be hydraulically tested as follows:**

- » Drain and thoroughly clean hose.
- » Carry out visual inspection. Hoses failing the visual inspection due to displacement of the hose wires, severe abrasion of the cover, or significant corrosion of the outer wire should not be tested.
- » Lay the hose straight out on supports which allow free movement under pressure.
- » Blank off the ends and fill the hose completely with water, ensure trapped air is released from the hose.
- » Pressurize the assembly to 1-1/2 times the maximum rated working pressure of the hose and hold this pressure for 10 minutes (or as specified) while examining for leaks. Also test for electrical continuity between the end connections.
- » Reduce pressure and drain hose.
- » On completion of this test the hose should be tested again for electrical continuity.

**NOTE:** Thermoplastic composite hoses elongate under pressure compared to rubber hose. Elongation under pressure is not an indication of hose condition or failure of reinforcements.

**CAUTION:** Do not test hoses that fail visual inspection.

## Inspection, Testing And Maintenance



**Electrical continuity tests** – every 6 months or more frequently...

**In order to prevent the accumulation of static charge generated in use, all metal parts of the assembly have been electrically bonded together during manufacture. At periods not exceeding six months the following test should be carried out.**

- » Lay the hose flat on the ground. Avoid contact on metallic parts to earth.
- » Check that the hose is electrically continuous from end to end. This can be done using a simple battery and bulb test or alternatively using an ohm meter. Resistance should be 10 ohms or less.



**Cleaning** – after use or prolonged storage, before testing...

- » Hoses should be cleaned after use and certainly before prolonged storage or testing.
- » Flushing out is sufficient in many circumstances using a variety of fluids, e.g. clean water, hot water detergents, common solvents at ambient temperature or seawater. If seawater is used for cleaning, this must be thoroughly drained out afterwards to minimize risk of corrosion on mild steel end fittings and on stainless or Galvanized Steel inner wires.
- » Loose steam may be used but the hose must be open ended and the maximum working temperature must not be exceeded.
- » Compressed air may be used but the hose must be open ended and the maximum working pressure must not be exceeded.
- » During any cleaning operation the hose must be electrically earthed.
- » Pigging must not be used under any circumstances.

**CAUTION:** High pressure steam or high pressure compressed air can be hazardous if hoses are restricted or clogged.



**Hose repairs** – consult United Flexible or your local distributor...

**Depending on overall condition, it may be possible to repair hoses damaged in service. The repair of polypropylene hoses requires specialized knowledge and procedures.**

**NOTE:** All repairs should be undertaken by trained and authorized personnel.



## Electrical Properties of Marine Dock Hose Assemblies

### Electrically Conductive Hose Assemblies

Low conductivity petroleum products and solvents such as gasoline & toluene become electrostatically charged when flowing through a pipeline and the pipeline itself acquires a charge of opposite polarity.

If the pipeline is earthed, the accumulated charge flows safely to ground. However, if the pipeline is not earthed, a charge could accumulate which may then be discharged instantaneously by an incendive spark to a nearby earthed conductor. If the spark has sufficient energy and an inflammable air/product mixture is present an explosion will result.

It is therefore normal practice for hoses generally to be specified that they be electrically conductive (with a maximum resistance of 10 ohms) so that the electrostatic charge is continuously drained away. Even so, it is common practice in the petroleum industry to specify a maximum flow velocity of 7m/sec when pumping low conductivity products to ensure that a charge is not generated more quickly than can be dissipated through normal arrangements.

Charges generated can be of many thousands of volts, but currents are of the order of a few microamps.

### Insul-Flange: A Cast-Nylon Insulating Flange for use on Marine Docks and Terminals

If the piping system of a marine terminal is electrically conductive, an electrical charge flows along the piping because of dock/pier-side cathodic protection systems. With the potential inductive effect of the piping system, a spark could occur at the moment when the hose is disconnected.

Insul-Flange controls undesirable electrical currents. The Insul-Flange prevents the heavy electrical flow in the piping system and eliminates the risk of an electrical arc when the hose is disconnected.

Construction: Insul-Flange is constructed of cast Nylon and is resistant to most common solvents, lubricants, hydrocarbons, esters, key tones and aqueous solutions of acids and alkalis at pH5 to pH 11. For more severe chemical service, PTFE lining is an option. Melting Point: 428°F/220°C. Elect. Resistivity: 1012 ohm/cm.

- » Insul-Flange retains the properties of insulating flange gasket kits, but they are much easier to install and inspect for the properties of non-conductivity.
- » Provides greater electrical resistance than regular insulating gasket kits.
- » Prevents any possibility of an electric arc upon disconnection of the hose.
- » Eliminates the need for separate bonding wire.
- » Complies with several standards:
  - California State Lands Commission, M.F.D. § 2380
  - U.S.C.G. 154.810 Vapor Line Connections, Section G - Facility Vapor Connections
  - ISGOTT Chapter 6 - Electrical Insulation



INSUL-FLANGE: ANSI CLASS 150 DRILLING						
Bore	O.D.	Length	No. of Bolts	Bolt Hole Diam.	Test Pressure (psi)	Longitudinal Stress (psi)
4	9	4¾	16	¾	750	600
6	11	9½	16	7/8	750	1221
8	13½	11¾	16	7/8	750	1333
10	16	14¼	24	1	750	1408
12	19	17	24	1	750	1273
16	23½	21¼	32	1⅛	750	1608


Other flange ratings or standards available on request

## Hose Handling Guide

United Flexible hose is manufactured to the highest technical standards to meet the most exacting service conditions. To maximize the service life of these quality hoses, we recommend that you follow these simple guidelines for either dock or hose tower operations.


### ✓ ALWAYS

1. support the hose at appropriate points with the slings provided
2. support the hose near manifold connections
3. protect hose against sharp edges (e.g. jetty edge, ship's guard rail etc.)
4. support hoses on hose towers
5. pick hose up by flange, not behind ferrule (hose towers)
6. adjust support as vessel elevation changes
7. store hose in straight line raised off the ground, preferably in a cool dark area

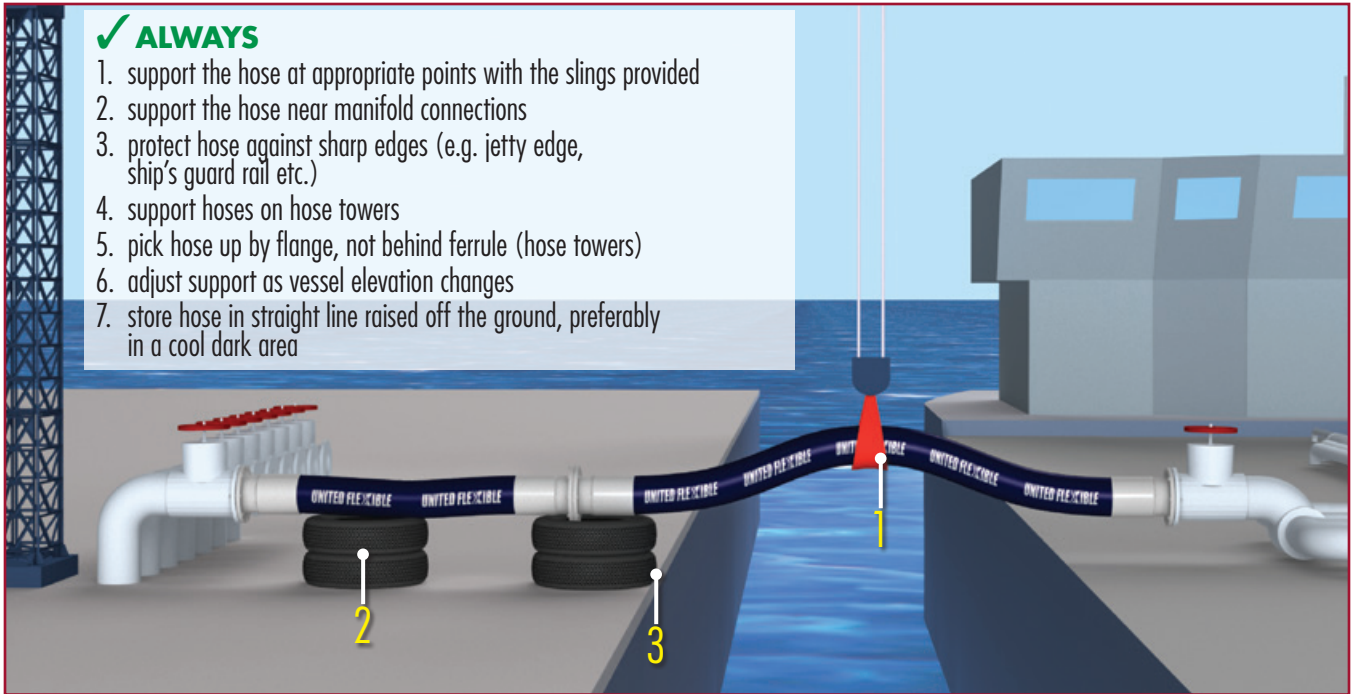

### ✗ NEVER

1. use hose unsupported
2. support hose with a single rope
3. allow hose to droop between ship and jetty
4. overbend hose
5. allow hose to contact sharp edge
6. allow hose to catch on rollers (hose towers)
7. allow the hose to be wound tighter than min bend radius (hose towers)

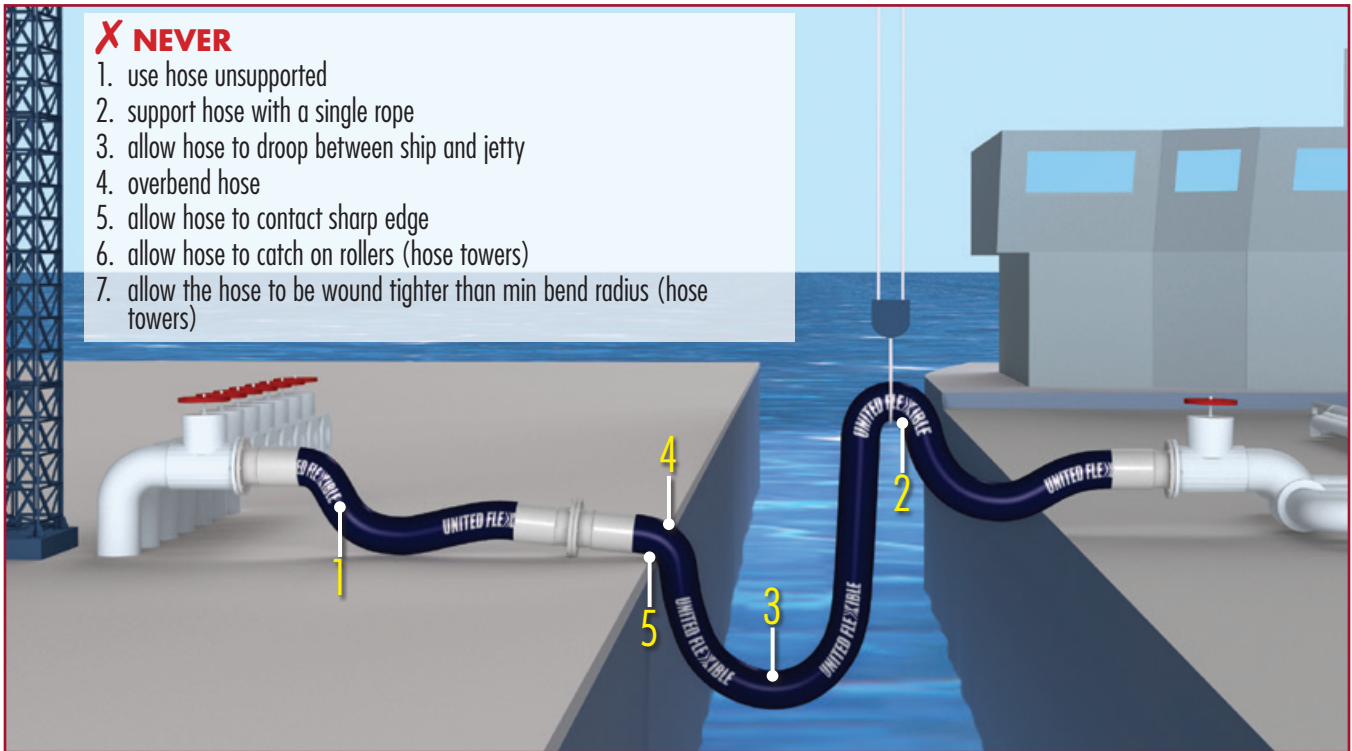

⚡ United Flexible hoses are electrically continuous end to end through both inner and outer wires. Against specific demand, insulating flanges are also available.

## Chemical Compatibility Chart for United Flexible Polypropylene and PTFE PFA Lined Composite Hoses

The following charts show the suitability of United Flexible polypropylene and PTFE PFA lined hoses and end fittings for use with various fluids. The information is based on the best data available. Recommendations are given only as a guide and apply only to the chemical compatibility of the hose and end fitting material.

Please consult United Flexible Engineering Department for recommendations on applications in excess of 140°F (60°C), or for other extreme service conditions outside the scope of the catalog ratings. Composite hose must be derated, i.e. lower maximum pressure as temperature rises, please consult with the United Flexible Engineering Department for this information. Allowances must be made when selecting hoses for extreme service conditions. It is not advisable to select a hose which will be subjected simultaneously to pressure, temperatures and bending radii at the maximum ratings of the hose.

The description of a hose, or end fitting material, as "suitable" does not ensure that the hose complies with any regulations or operating requirements governing the handling of the chemical or the use of the hose.

A hose conveying a chemical having an oxidizing effect should be checked for internal discoloration particularly if the hose may be used on an application where color contamination is not permissible.

Clients who are unfamiliar with the characteristics of composite constructed hose may express concern with the amount of elongation or growth of these hose types during pressurization.

Unlike rubber hoses, elongation as an indication of deterioration cannot be applied to composite hose.

In a composite hose, much of the elongation is due to 'non-elastic elongation' and arises from the inherent compressibility of the hose wall normal to their plane. This is recognized in both British and International Standards, please contact the United Flexible Engineering Department on details of these standards and engineering formulae related to it.

Contact the United Flexible Engineering Department regarding the maximum flow velocity of United Flexible composite hoses and calculations regarding pressure drop.

### Inner Wire composition of United Flexible Polypropylene Hoses

1. **Polypropylene Coated Carbon Steel** — Such as: Chemiflex® PGP and PSP.
2. **T316 Stainless Steel** — Such as: Chemiflex® SGP and SSP.
3. **Galvanized Steel** — Such as: Oilmaster GGP.
4. **T316 Stainless Steel** — with PTFE lining such as Special Chemiflex® and ThermMaster® SGF.

### End Fitting Materials

CS **Carbon Steel**

SS **T316 Stainless Steel**

PP **Polypropylene**

**Exotic materials** and **aluminum** end fittings are also available. Contact factory for more details.

### Suitability

#### Hose

- A — SUITABLE for use at 140°F (60°C).
- B — SUITABLE for use at worldwide AMBIENT temperatures.
- C — SUITABLE for INTERMITTENT use at worldwide AMBIENT temperatures.
- D — UNSUITABLE or no data available.

#### End Fittings

- — SUITABLE for the operating conditions applicable to the hose.
- X — UNSUITABLE or no data available.

For fluids that are not listed or service conditions outside the scope of those described, please consult United Flexible Engineering Department.

United Flexible Inc. reserves the right to change specifications and ratings without notice.

The conditions or methods of storage, handling, use and testing of our products are beyond our control. We do not therefore accept responsibility and expressly disclaim liability for any loss, damage or expense arising from the storage, handling, use, testing and disposal of the product.

Chemical	Hose				Fittings		
	1	2	3	4	CS	SS	PP
Acetaldehyde	C	C	D	A	X	•	•
Acetic acid (60%)	A	A	D	A	X	•	•
Acetic acid (glacial)	B	B	D	A	X	•	•
Acetic anhydride	B	B	D	A	X	•	•
Acetoacetic ester	C	C	D	A	•	•	•
Acetone	A	A	A	A	•	•	•
Acetone cyanohydrin	B	B	D	A	•	•	•
Acetonitrile	B	B	B	A	•	•	•
Acetophenone	B	B	B	A	•	•	•
Acetylacetone	B	B	B	A	•	•	•
Acetyl chloride	D	D	D	A	X	•	X
Acetylene dichloride	B	B	B	A	•	•	•
Acetylene tetrachloride	C	C	C	A	•	•	•
Acrolein (acrylaldehyde)	B	B	B	A	•	•	•
Acrylamide (50% in solution)	C	C	D	A	•	•	•
Acrylic acid	B	B	D	A	X	•	•
Acrylonitrile	A	A	D	A	•	•	•
Adipic acid (aqueous)	A	A	A	A	X	•	•
Adiponitrile	B	B	B	A	•	•	•
Alcohols	B	B	B	A	•	•	•
Alkyl acrylate vinyl pyridine copolymer in toluene	C	C	C	A	•	•	•
Alkyl benzene sulphonic acid	C	C	D	A	X	•	•
Allyl alcohol	A	A	A	A	•	•	•
Allyl bromide	C	C	C	A	•	•	•
Allyl chloride	C	C	C	A	•	•	•
Alums (aqueous - saturated)	A	A	A	A	•	•	•
Aluminum salts (excluding halides - saturated)	A	B	D	A	•	•	•
Aluminum chloride (saturated)	A	D	D	D	X	X	•
2-(2-Aminoethoxy) ethanol	C	C	D	A	•	•	•
Aminoethyl ethanolamine	B	B	D	A	•	•	•
n-Aminoethylpiperazine	C	C	D	A	•	•	•
Ammonia (28% in solution)	A	A	D	A	•	•	•
Ammonium chloride (saturated)	A	C	D	A	•	•	•
Ammonium nitrate (93% in solution)	D	C	C	A	X	•	X
Ammonium salts (excluding halides - saturated)	A	B	D	A	•	•	•
Ammonium sulphide (<45% in solution)	C	C	D	A	X	•	•
Amyl acetate (commercial)	C	C	C	A	•	•	•
n-Amyl acetate	C	C	C	A	•	•	•
sec-Amyl acetate	C	C	C	A	•	•	•
Amyl alcohol	B	B	B	A	•	•	•
Amyl chloride	C	C	C	A	•	•	•
Amyl Chloronaphthalene	D	D	d	A	X	•	X
Anhydrous Ammonia	Use Cryoflex® 50				X	•	X
Aniline (dedicated hose)	C	B	D	A	•	•	•
Animal oils	A	A	A	A	•	•	•
Anisole	C	C	C	A	X	•	•
Antimony chloride	B	D	D	A	X	•	•
Aqua regia	C	D	D	A	X	•	•
Aviation fuel	C	C	C	A	•	•	•
Barium salts (saturated)	A	B	D	A	•	•	•
Benzaldehyde	C	C	D	A	X	•	•
Benzene	C	C	C	A	•	•	•
Benzene sulphonyl chloride	D	D	D	D	X	X	X
Benzene sulphonic acid	C	C	D	A	X	•	X
Benzoic acid	A	A	D	A	•	•	•
Benzoyl chloride	C	C	C	A	•	•	•
Benzyl alcohol	A	A	A	A	•	•	•
Benzyl butyl phthalate	B	B	B	A	•	•	•
Benzyl chloride	C	C	C	A	X	•	•
Biodiesel	C	C	D	A	•	•	•

Chemical	Hose				Fittings		
	1	2	3	4	CS	SS	PP
Black liquor	C	C	D	A	X	•	•
Bleach (12.5%Cl)	C	C	D	A	•	•	•
Borax (aqueous)	A	A	A	A	•	•	•
Boric acid (aqueous)	A	A	D	A	X	•	•
Brine (saturated)	A	C	D	A	X	•	•
Bunker 'C' Fuel Oil	A	A	A	A	•	•	•
Bunker Oil	A	A	A	A	•	•	•
Butadiene	B	B	B	A	•	•	•
Butane liquid	Use Cryoflex® 50					•	
Butanediol	B	B	B	A	•	•	•
Butyl alcohol	A	A	A	A	•	•	•
n-Butyl acetate	C	C	C	A	•	•	•
n-Butyl acrylate	B	B	B	A	•	•	•
n-Butylamine	B	B	D	A	•	•	•
Butyl benzene	B	B	B	A	•	•	•
Butyl benzyl phthalate	B	B	B	A	•	•	•
Butyl bromide	D	D	D	A	X	•	X
Butyl butyrate	B	B	B	A	•	•	•
Butyl carbitol	A	A	A	A	•	•	•
Butyl carbitol acetate	C	C	C	A	•	•	•
Butyl cellosolve	A	A	A	A	•	•	•
Butyl cellosolve acetate	C	C	C	A	•	•	•
Butyl chloride	D	D	D	A	X	•	X
Butyl/decyl/cetyl-eicosylmethacrylate mixture	C	C	C	A	•	•	•
Butylene glycol	A	A	A	A	•	•	•
n-Butyl ether	B	B	B	A	•	•	•
Butyl ethyl ether	B	B	B	A	•	•	•
Butyl methacrylate	C	C	C	A	•	•	•
Butyl methoxyethyl ether	C	C	C	A	•	•	•
Butyl phthalate	A	A	A	A	•	•	•
Butyl stearate	B	B	B	A	•	•	•
n-Butyraldehyde	C	C	D	A	•	•	•
Butyric acid (20%)	B	B	B	A	•	•	•
Butyrolactone	C	C	C	A	•	•	•
Calcium salts (excluding halides & hypochlorite - saturated)	A	B	D	A	•	•	•
Calcium alkyl salicylate solution	A	A	D	A	•	•	•
Calcium chloride (saturated)	A	C	D	A	X	•	•
Calcium hypochlorite (12.5% CL)	C	C	D	C	X	•	•
Calcium naphthenate in mineral oil	C	C	C	A	•	•	•
Camphor oil	C	C	C	A	•	•	•
Caprylic acid	A	A	A	A	•	•	•
Carbinols	B	B	B	A	•	•	•
Carbitol acetate	C	C	C	A	•	•	•
Carbitols	B	B	B	A	•	•	•
Carbolic acid	A	A	D	A	X	•	•
Carbolic oil (middle oil)	C	C	C	A	•	•	•
Carbon dioxide (liquid)	Use Cryoflex® 50				X	•	X
Carbon disulphide	C	C	C	D	•	•	•
Carbonic acid	A	A	D	A	X	•	•
Carbon tetrachloride	C	C	C	A	•	•	•
Cashew nut shell oil	B	B	B	A	•	•	•
Caustic potash (<50%)	A	B	D	A	•	•	•
Caustic soda (<50%)	A	B	D	A	•	•	•
Cellosolve	B	B	B	A	•	•	•
Cetyl-eicosyl methacrylate mixture	C	C	C	A	•	•	•
Chloroacetic acid (<80%)	B	D	D	D	X	X	•
Chlorobenzene	C	C	C	A	•	•	•
Chlorobutane	C	C	C	A	•	•	•
Chloroform	C	C	C	A	•	•	•

Chemical	Hose				Fittings		
	1	2	3	4	CS	SS	PP
Chlorohydrins (crude)	C	C	C	A	•	•	•
o-Chloronitrobenzenes	C	C	C	A	•	•	•
Chloroprene	C	C	C	A	X	•	•
2- or 3-Chloropropionic acid	C	C	D	A	X	•	•
Chlorosulphonic acid	D	D	D	A	X	•	•
o- or m- or p-Chlorotoluene	C	C	C	A	•	•	•
Chlorotoluenes (mixed isomers)	C	C	C	A	•	•	•
Chrome alum (saturated)	A	A	D	A	•	•	•
Chromic acid (<50% - aqueous)	C	C	D	A	X	•	•
Citric acid	A	A	D	A	X	•	•
Coal tar naphtha	B	B	B	A	•	•	•
Copper salts (excluding halides - saturated)	A	A	D	A	•	•	•
Copper chloride (saturated)	A	D	D	D	X	X	•
Corn Oil	A	A	D	A	X	•	•
Corn Syrup	A	A	D	A	X	•	•
Creosote (wood or coal tar)	B	B	B	A	•	•	•
Cresols (<90% - mixed isomers)	A	A	A	A	•	•	•
Crotonaldehyde	C	C	C	A	•	•	•
Cumene (Isopropyl Benzene)	B	B	B	A	•	•	•
Cutting Oil	A	A	A	A	•	•	•
Cyclohexane	B	B	B	A	•	•	•
Cyclohexanol	B	B	B	A	•	•	•
Cyclohexanone	C	C	C	A	•	•	•
Cyclohexylamine	B	B	D	A	•	•	•
Cyclopentane	B	B	B	A	•	•	•
p-Cymene	B	B	B	A	•	•	•
Decalin	D	D	D	A	X	•	X
Decene	C	C	C	A	•	•	•
Decyl acrylate	B	B	D	A	•	•	•
Decyl alcohol	B	B	B	A	•	•	•
Detergents	A	A	A	A	•	•	•
Dextrin	A	A	A	A	•	•	•
Diacetone alcohol	B	B	B	A	•	•	•
Diaminoethylamine	B	B	C	A	•	•	•
Diamylamine	B	B	C	A	•	•	•
Dibromoethane	B	B	D	A	•	•	•
Dibutylamine	B	B	C	A	•	•	•
Dibutyl ether	C	C	C	A	•	•	•
Dibutyl phthalate	B	B	B	A	•	•	•
Dibutyl sebacate	B	B	B	A	•	•	•
Dichloroacetic acid	C	D	D	D	X	X	•
o-Dichlorobenzene	C	C	C	A	•	•	•
Dichlorobutane	C	C	C	A	•	•	•
Dichlorodifluoromethane	Use Cryoflex® 50				X	•	X
1,1-Dichloroethane	C	C	C	A	•	•	•
Dichlorethylene	C	C	C	A	•	•	•
Dichloroethyl ether	C	C	C	A	•	•	•
2,2-Dichloroisopropyl ether	C	C	C	A	•	•	•
Dichloromethane	C	C	C	A	•	•	•
2,4-Dichlorophenol	C	C	D	A	X	•	•
2,4-Dichlorophenoxyacetic acid, diethanolamine salt solution	C	C	D	A	•	•	•
2,4-Dichlorophenoxyacetic acid, dimethyl amine salt solution (<70% dimethylamine salt)	C	C	D	A	•	•	•
2,4-Dichlorophenoxyacetic acid, triisopropanolamine salt solution	C	C	D	A	•	•	•
1,2-Dichloropropane	C	C	C	A	•	•	•
1,3-Dichloropropane	C	C	C	A	•	•	•
Dichloropropane/dichloropropene mixtures	C	C	C	A	•	•	•
1,3-Dichloropropene	C	C	C	A	•	•	•

Chemical	Hose				Fittings		
	1	2	3	4	CS	SS	PP
2,2-Dichloropropionic acid	C	C	D	A	•	•	•
Dichloropropylene	C	C	C	A	•	•	•
Dicyclopentadiene	D	D	D	D	X	X	X
Diesel Emissions Fluid	B	B	A	A	X	•	•
Diesel oil	B	B	B	A	•	•	•
Diethanolamine	A	A	D	A	•	•	•
Diethylamine	B	B	D	A	•	•	•
Diethylamino ethanol	B	B	C	A	•	•	•
Diethyl benzene	B	B	B	A	•	•	•
Diethylene dioxide	B	B	B	A	•	•	•
Diethylene glycol	A	A	A	A	•	•	•
Diethylene glycol diethyl ether	B	B	B	A	•	•	•
Diethylene glycol methyl ether	C	C	C	A	•	•	•
Diethylene glycol monobutyl ether	C	C	C	A	•	•	•
Diethylene glycol monobutyl ether acetate	C	C	C	A	•	•	•
Diethylene glycol monoethyl ether	C	C	C	A	•	•	•
Diethylene glycol monoethyl ether acetate	C	C	C	A	•	•	•
Diethylene glycol monomethyl ether	C	C	C	A	•	•	•
Diethylene glycol monomethyl ether acetate	C	C	C	A	•	•	•
Diethylenetriamine	B	B	D	A	•	•	•
Diethyl ethanolamine	B	B	D	A	•	•	•
Diethyl ether	B	B	B	A	•	•	•
Di(2-ethylhexyl) phosphoric acid	C	C	D	A	X	•	•
Diethyl ketone	B	B	B	A	•	•	•
Diethyl oxalate	B	B	B	A	•	•	•
Diethyl phthalate	A	A	A	A	•	•	•
Diethyl sebacate	A	A	A	A	•	•	•
Diethyl sulphate	B	B	D	A	•	•	•
Diglycidyl ether of bisphenol A	C	C	C	A	•	•	•
Diisobutylamine	B	B	B	A	•	•	•
Diisobutylene	B	B	B	A	•	•	•
Diisobutyl ketone	B	B	B	A	•	•	•
Diisobutyl phthalate	B	B	B	A	•	•	•
Diisooctyl adipate	B	B	B	A	•	•	•
Diisooctyl phthalate	A	A	A	A	•	•	•
Diisopropanolamine	B	B	D	A	•	•	•
Diisopropylamine	B	B	D	A	•	•	•
Diisopropyl benzene (all isomers)	C	C	C	A	•	•	•
Diisopropyl ether (DIPE)	B	B	B	A	•	•	•
Diisopropyl ketone	B	B	B	A	•	•	•
Dimethylamine (<45% - aqueous)	B	B	D	A	•	•	•
Dimethylamine (45%-55% in solution)	C	C	D	A	•	•	•
Dimethylamine (55%-65% in solution)	C	C	D	A	•	•	•
n,n-Dimethylcyclohexylamine	C	C	D	A	•	•	•
Dimethyl ethanolamine	B	B	D	A	•	•	•
Dimethyl formamide	A	A	A	A	•	•	•
Dimethyl hydrogen phosphite	C	C	D	A	X	•	•
Dimethyl ketone	A	A	A	A	•	•	•
Dimethyl phthalate	B	B	B	A	•	•	•
Dimethyl sulphate	B	B	D	A	•	•	•
Dimethyl sulphide	B	B	B	A	•	•	•
Dinitrobenzene	C	C	C	A	•	•	X
Dinitrotoluene (molten)	D	D	D	D	X	X	X
Diocetylamine	B	B	B	A	•	•	•
Diocetyl phthalate	B	B	B	A	•	•	•
Diocetyl sebacate	B	B	B	A	•	•	•
1 A-Dioxane	C	C	C	A	•	•	•
DIPE (See Diisopropyl ether)	B	B	B	A	•	•	•
Dipentene	B	B	B	A	•	•	•
Diphenyl ether	B	B	B	A	•	•	•



Chemical	Hose				Fittings		
	1	2	3	4	CS	SS	PP
Diphenylmethane diisocyanate	B	B	B	A	•	•	•
Diphenyl phthalate	B	B	B	A	•	•	•
Diphenyl oxide/diphenyl phenyl ether mixture	D	D	D	D	X	X	X
Di-n-propylamine	B	B	B	A	•	•	•
Dipropylene glycol	A	A	A	A	•	•	•
Dipropylene glycol monomethyl ether	C	C	C	A	•	•	•
Disulphuric acid	D	D	D	A	X	•	X
Dodecene (all isomers)	C	C	C	A	•	•	•
Dodecyl alcohol	B	B	B	A	•	•	•
Dodecyl benzene	B	B	B	A	•	•	•
Dodecyl benzene sulphonic acid	C	C	D	A	X	•	•
Dodecyl diphenyl oxide disulphonate solution	C	C	C	A	•	•	•
Dodecyl methacrylate	D	D	D	D	X	X	X
Dodecyl-pentadecyl methacrylate mixture	C	C	C	A	•	•	•
Dodecyl phenol	B	B	B	A	•	•	•
Epichlorohydrin	B	B	B	A	•	•	•
Epoxy Resin	A	A	D	A	X	•	•
Ethanol	B	B	B	A	•	•	•
Ethyl alcohol	A	A	A	A	•	•	•
Ethanolamine	A	A	B	A	•	•	•
Ethoxy ethanol	C	C	C	A	•	•	•
2-Ethoxyethyl acetate	C	C	C	A	•	•	•
Ethoxy propanol	C	C	C	A	•	•	•
Ethyl acetate	C	C	C	A	•	•	•
Ethyl acrylate	B	B	B	A	•	•	•
Ethyl aluminum dichloride	D	D	D	A	X	•	X
Ethylamine	B	B	C	A	•	•	•
Ethyl benzene	B	B	B	A	•	•	•
Ethyl butanol	B	B	B	A	•	•	•
n-Ethyl butylamine	B	B	C	A	•	•	•
Ethyl chloride	C	C	C	A	•	•	•
Ethyl cyclohexane	C	C	C	A	•	•	•
n-Ethyl cyclohexylamine	C	C	C	A	•	•	•
Ethylene carbonate	B	B	C	A	•	•	•
Ethylene chloride	C	C	C	A	•	•	•
Ethylene chlorohydrin	B	B	B	A	•	•	•
Ethylene cyanohydrin	B	B	B	A	•	•	•
Ethylene diamine	B	B	B	A	•	•	•
Ethylene dibromide	B	B	C	A	•	•	•
Ethylene dichloride	C	C	C	A	•	•	•
Ethylene glycol	A	A	A	A	•	•	•
Ethylene glycol methyl butyl ether	B	B	B	A	•	•	•
Ethylene glycol monobutyl ether	A	A	A	A	•	•	•
Ethylene glycol monobutyl ether acetate	B	B	B	A	•	•	•
Ethylene glycol monoethyl ether	A	A	A	A	•	•	•
Ethylene glycol monomethyl ether	B	B	B	A	•	•	•
Ethylene glycol monomethyl ether acetate	B	B	B	A	•	•	•
Ethylene glycol monophenyl ether	B	B	B	A	•	•	•
Ethylene oxide (dedicated hose)	B	B	D	A	X	•	•
Ethylene oxide/propylene oxide mixtures (<30% ethylene oxide)	C	C	D	A	X	•	•
Ethyl ether	B	B	B	A	•	•	•
Ethyl formate	B	B	D	A	•	•	•
Ethyl hexanoic acid	B	B	D	A	X	•	•
Ethyl hexyl alcohol	A	A	A	A	•	•	•
2-Ethyl hexyl acrylate	B	B	C	A	•	•	•
2-Ethyl hexylamine	B	B	C	A	•	•	X
Ethylidene norbornene	C	C	C	A	•	•	•
Ethyl iodide	C	C	C	A	•	•	•
Ethyl isobutyl ether	B	B	D	A	•	•	•

Chemical	Hose				Fittings		
	1	2	3	4	CS	SS	PP
Ethyl methacrylate	C	C	C	A	•	•	•
2-Ethyl-3-propylacrolein	C	C	C	A	•	•	•
Ethyl propyl ether	B	B	B	A	•	•	•
Ethyl propyl ketone	C	C	C	A	•	•	•
Ethyl silicate	A	A	A	A	•	•	•
Ethyl sulphate	B	B	B	A	•	•	•
Ethyl vinyl ether	B	B	B	A	•	•	•
Fatty acids	A	A	D	A	X	•	•
Fatty alcohols	A	A	A	A	•	•	•
Ferrous, ferric salts (excluding halides)	A	B	D	A	•	•	•
Fluorinated refrigerants	Use Cryoflex 50		D	D	D	X	•
Fluorine	Use S/S Hose PTFE		D	D	D	X	•
Fluosilicic acid	A	D	D	D	X	•	•
Formaldehyde solution (<45%)	A	A	A	A	•	•	•
Formamide	A	B	D	A	X	•	•
Formic acid	A	A	D	A	X	•	•
Freons	Use Cryoflex 50		D	D	D	X	•
Fructose	A	A	A	A	•	•	•
Fruit juices	A	A	D	A	•	•	•
Fuel oil	B	B	B	A	•	•	X
Fumaric adduct of rosin (water dispersion)	C	C	C	A	•	•	•
Furfural	B	B	B	A	•	•	•
Furfuryl alcohol	B	B	B	A	•	•	•
Gallic acid solution	A	A	C	A	•	•	•
Gasoline	B	B	B	A	•	•	•
Gelatine (aqueous)	A	A	A	A	•	•	•
Gluconic acid	A	A	C	A	•	•	•
Glucose (aqueous)	A	A	A	A	•	•	•
Glue	B	B	D	A	•	•	•
Gluteraldehyde solutions (50% or less)	C	C	C	A	•	•	•
Glycerine	A	A	A	A	•	•	•
Glycidyl ester of C10 trialkylacetic acid	C	C	C	A	•	•	•
Glycolic acid (<37% - aqueous)	A	A	D	A	•	•	•
Glycols (aqueous)	A	A	A	A	•	•	•
Grease	B	B	B	A	•	•	•
Green sulphate liquor	B	B	D	A	X	•	•
Heptane	B	B	B	A	•	•	•
Heptanoic acid	B	B	D	A	X	•	•
Heptanol (all isomers)	A	A	A	A	•	•	•
Heptanone	B	B	B	A	•	•	•
Heptene (mixed isomers)	A	A	A	A	•	•	•
Hexamethylene diamine	B	B	D	A	•	•	•
Hexamethyleneimine	C	C	D	A	•	•	•
Hexamethylene tetramine	B	B	D	A	•	•	•
1-Hexane	B	B	B	A	•	•	•
Hexanol	A	A	A	A	•	•	•
Hexene	A	A	A	A	•	•	•
Hexyl acetate	C	C	C	A	•	•	•
Hexylamine	B	B	D	A	•	•	•
Hexylene glycol	A	A	A	A	•	•	•
Hydrazine hydrate	B	B	D	A	X	•	•
Hydrobromic acid (<50%)	A	D	D	D	X	X	•
Hydrochloric acid (<37%)	C	D	D	D	X	X	•
Hydrofluoric acid (<50%)	C	D	D	D	X	X	•
Hydrofluosilicic acid	A	A	D	A	X	•	•
Hydrogen peroxide (<50%)	B	B	D	A	X	•	•
Hydrogen sulphide (aqueous - saturated)	A	D	D	D	X	•	•
Hydroquinone	A	A	A	A	•	•	•
2-Hydroxyethyl acrylate	C	C	C	A	•	•	•
Ink	B	B	B	A	X	•	•



Chemical	Hose				Fittings		
	1	2	3	4	CS	SS	PP
Iodine solution	B	D	D	D	•	•	•
Iron halides	A	D	D	D	X	X	•
Iron salts (excluding halides - saturated)	A	B	D	A	•	•	•
Isoamyl acetate	B	B	B	A	•	•	•
Isoamyl alcohol	B	B	B	A	•	•	•
Isoamyl bromide	B	D	D	D	X	•	•
Isoamyl butyrate	B	B	B	A	•	•	•
Isoamyl chloride	C	C	D	A	X	•	•
Isoamyl ether	B	B	B	A	•	•	•
Isobutyl acetate	B	B	B	A	•	•	•
Isobutyl acrylate	B	B	B	A	•	•	•
Isobutyl alcohol	A	A	A	A	•	•	•
Isobutylamine	B	B	D	A	•	•	•
Isobutyl bromide	B	D	D	D	X	X	•
Isobutyl chloride	B	D	D	D	X	X	•
Isobutyl ether	C	C	C	D	•	•	•
Isobutyl formate	C	C	C	A	•	•	•
Isobutyl methyl ketone	B	B	B	A	•	•	•
Isobutyraldehyde	B	B	D	A	•	•	•
Isodecyl alcohol	A	A	A	A	•	•	•
Isooctane	C	C	C	A	•	•	•
Isopentane	C	C	C	A	•	•	•
Isopentene	C	C	C	A	•	•	•
Isophorone	B	B	B	A	•	•	•
Isophorone diamine	C	C	D	A	•	•	•
Isophorone diisocyanate	C	C	C	A	•	•	•
Isoprene	B	B	B	A	•	•	•
Isopropanolamine	B	B	D	A	•	•	•
Isopropyl acetate	C	C	C	A	•	•	•
Isopropyl alcohol	A	A	A	A	•	•	•
Isopropylamine	B	B	D	A	•	•	•
Isopropyl benzene	B	B	B	A	•	•	•
Isopropyl chloride	B	D	D	A	X	•	•
Isopropyl ether	C	C	C	A	•	•	•
Isopropyl toluene	B	B	B	A	•	•	•
Isovaleraldehyde	C	C	C	A	•	•	•
Jams	A	A	B	A	•	•	•
Jet fuel	C	C	C	A	•	•	•
Kerosene	B	B	B	A	•	•	•
Ketones	B	B	B	A	•	•	•
Lacquers	B	B	D	A	X	•	•
Lactic acid (<20%)	A	B	D	A	•	•	•
Lanolin	A	A	A	A	•	•	•
Lard	A	A	A	A	•	•	•
Latex (low viscosity)	A	A	A	A	•	•	•
Lauryl alcohol	B	B	B	A	•	•	•
Lead salts (saturated)	A	B	D	A	X	•	•
Ligroin	C	C	C	A	•	•	•
Limonene	B	B	B	A	•	•	•
Linseed oil	A	A	A	A	•	•	•
Liquefied Carbon Dioxide	Use Cryoflex® 50				X	•	X
Liquefied Petroleum Gas	Use Cryoflex 50				D	D	D
Lubricating oil	B	B	B	A	•	•	•
Magnesium salts (saturated)	A	B	D	A	X	•	•
Maleic acid solution	A	B	D	A	X	•	•
Maleic anhydride solution	B	B	D	A	X	•	•
Malic acid solution	B	B	D	A	X	•	•
Manganese salts (saturated)	A	B	D	A	X	•	•
MBK (See Methyl butyl ketone)							
MEK (See Methyl ethyl ketone)							

Chemical	Hose				Fittings		
	1	2	3	4	CS	SS	PP
Mercaptobenzothiazol, sodium salt solution	C	C	C	A	•	•	•
Mercuric chloride (saturated)	A	D	D	D	X	X	•
Mesityl oxide	A	A	B	A	•	•	•
Methacrylic acid	B	B	D	A	•	•	•
Methacrylonitrile	C	C	C	A	•	•	•
Methanol	C	C	C	A	•	•	•
Methyl acetate	C	C	C	A	•	•	•
Methyl aceto acetate	C	C	D	A	X	•	•
Methyl acetone	B	B	B	A	•	•	•
Methyl acrylate	B	B	B	A	•	•	•
Methyl alcohol	A	A	A	A	•	•	•
Methylamine	B	B	C	A	•	•	•
Methyl amyl acetate	C	C	C	A	•	•	•
Methyl amyl alcohol	B	B	B	A	•	•	•
Methyl amyl ketone	B	B	B	A	•	•	•
Methyl butyl ketone (MBK)	B	B	B	A	•	•	•
Methyl butyraldehyde	D	D	D	A	X	•	X
Methyl cellosolve	B	B	B	A	•	•	•
Methyl cellosolve acetate	C	C	C	A	•	•	•
Methyl chloride	D	D	D	A	X	•	•
Methyl cyanide	B	B	B	A	•	•	•
Methyl cyclohexane	B	B	B	A	•	•	•
Methylene bromide	C	C	D	A	•	•	•
Methylene chloride	C	C	C	A	•	•	•
Methyl ethyl ketone (MEK)	C	C	C	A	•	•	•
Methyl ethylpyridine	C	C	C	A	•	•	•
2-Methyl-5-ethylpyridine	C	C	C	A	•	•	•
Methyl formate	C	C	C	A	•	•	•
2-Methyl-2-hydroxy-3-butyne	C	C	C	A	•	•	•
Methyl isobutyl ketone	C	C	C	A	•	•	•
Methyl methacrylate	C	C	C	A	•	•	•
Methyl nitrobenzene	B	B	B	A	•	•	•
Methyl pentene	B	B	B	A	•	•	•
2-Methyl-1-pentene	C	C	C	A	•	•	•
2-Methyl pyridine	B	B	B	A	•	•	X
4-Methyl pyridine	C	C	C	A	•	•	X
n-Methyl-2-pyrrolidone	C	C	C	A	•	•	X
Methyl salicylate	C	C	C	A	•	•	•
α-Methylstyrene	B	B	B	A	•	•	•
Methyl tert-butyl ether (MTBE) See also MTBE-Master	C	C	C	A	•	•	•
Mineral jelly	A	A	A	A	•	•	•
Mineral oil	B	B	B	A	•	•	•
Mineral spirits	B	B	B	A	•	•	•
Molasses	A	A	A	A	•	•	•
Molten Sulphur	See ThermMaster				D	D	D
Monochlorobenzene	D	D	D	A	X	•	X
Monoethanolamine	A	A	B	A	•	•	•
Monoethylamine	B	B	C	A	•	•	•
Monoisopropanolamine	B	B	D	A	•	•	•
Mononitrobenzene	B	B	B	A	•	•	•
Morpholine	B	B	C	A	•	•	•
Motor fuel anti-knock compounds (unleaded)	B	B	B	A	•	•	•
Motor Oil	A	A	A	A	•	•	•
MTBE (See Methyl tert-butyl ether)	A	A	A	A	•	•	•
Naphtha	B	B	B	A	•	•	•
Naphtha solvent	C	C	C	A	•	•	•
Naphthalene solution	A	A	A	A	•	•	•
Naphthalene (molten)	D	D	D	D	X	X	X
Neodecanoic acid	C	C	D	A	•	•	•

Chemical	Hose				Fittings		
	1	2	3	4	CS	SS	PP
Neohexane	B	B	B	A	•	•	•
Nickel chloride (saturated)	A	D	D	D	X	•	X
Nickel salts (excluding chlorides - saturated)	A	B	D	A	X	•	•
Nitrating acid (mixture of sulphuric & nitric acids)	D	D	D	D	X	X	X
Nitric acid (<10%)	A	A	D	A	X	•	X
Nitric acid (10%-60%)	C	C	D	A	X	•	X
Nitric acid (>60%)	D	D	D	A	X	•	X
Nitrobenzene	B	B	B	A	•	•	•
o-Nitrophenol solution	A	A	D	A	•	•	•
o-Nitrophenol (molten)	D	D	D	D	X	X	•
1- or 2-Nitropropane	B	B	B	A	•	•	•
Nitropropane/nitroethane (60/40 mixture)	C	C	C	A	•	•	•
o-Nitrotoluene	B	B	B	A	•	•	X
p-Nitrotoluene	D	D	D	D	X	X	•
Nonane	B	B	B	A	•	•	•
Nonyl alcohol	B	B	B	A	•	•	•
Nonylphenol	B	B	C	A	•	•	•
Octane	B	B	B	A	•	•	•
Octanol (all isomers)	B	B	B	A	•	•	•
Octene (all isomers)	C	C	C	A	•	•	•
Octyl acetate	C	C	C	A	•	•	•
Octyl acrylate	B	B	B	A	•	•	•
Olefins (straight chain mixtures)	C	C	C	A	•	•	•
α-Olefin mixtures	C	C	C	A	•	•	•
Oils (most commercial)	B	B	B	A	•	•	•
Oleic acid	B	B	D	A	X	•	•
Oleum (Sulphuric acid - fuming)	D	D	D	A	X	•	•
Oils (most commercial)	B	B	B	A	•	•	•
Oxalic acid (<50%)	B	B	D	A	X	•	•
Paint	A	A	A	A	•	•	•
Palm oil	B	B	B	A	•	•	•
Paraffin wax	A	A	A	A	•	•	•
Paraldehyde	C	C	C	A	•	•	•
Paraxylene	C	C	C	A	•	•	•
Pentachloroethane	C	C	C	A	•	•	•
1,3-Pentadiene	C	C	C	A	•	•	•
n-Pentane	B	B	B	A	•	•	•
Pentanol	A	A	A	A	•	•	•
Pentanone	B	B	B	A	•	•	•
Pentene (all isomers)	B	B	B	A	•	•	•
Perchloric acid (<50%)	B	D	D	D	X	•	•
Perchloroethylene	C	C	C	A	X	•	•
Petrolatum	A	A	A	A	•	•	•
Petroleum	A	A	A	A	•	•	•
Petroleum (to max 320F/160C)	Use ThermMaster	D	D	D	•	•	X
Petroleum ether	C	C	C	A	•	•	•
Petroleum naphtha	C	C	C	A	•	•	•
Phenol	C	A	B	A	X	•	•
Phenoxyethanol	C	C	C	A	•	•	•
Phenylhydrazine	C	C	D	A	X	•	•
1-Phenyl-1-xylyl ethane	C	C	C	A	•	•	•
Phosphoric acid (<95%)	A	A	D	A	X	•	•
Phosphorus (yellow or white)	D	D	D	D	X	X	X
Phosphorus oxychloride	C	D	D	D	X	X	•
Phosphorus pentoxide	A	B	D	A	X	•	X
Phosphorus trichloride	B	D	D	D	X	•	X
Phthalic acid (<50%)	B	B	D	A	X	•	X
Phthalic anhydride	D	D	D	D	X	X	X
Picric acid (1%)	B	B	D	A	X	•	•
Pinene	B	B	B	A	•	•	•

Chemical	Hose				Fittings		
	1	2	3	4	CS	SS	PP
Pine oil	B	B	B	A	•	•	•
Plasticisers (most commercial)	B	B	B	A	•	•	•
Polyethylene glycol	B	B	B	A	•	•	•
Polyethylene polyamines	C	C	D	A	X	•	•
Polymethylene polyphenyl isocyanate	B	B	B	A	•	•	•
Polypropylene glycol	B	B	B	A	•	•	•
Potassium halides	A	D	D	D	X	•	•
Potassium hydroxide solution	C	C	D	A	X	•	•
Potassium salts (excluding halides - saturated)	A	B	D	A	X	•	•
Propane	Use Cryoflex®	D	D	D	•	•	X
n-Propanolamine	C	C	D	A	X	•	•
Propanoic acid	B	B	D	A	X	•	•
b-Propiolactone	C	C	C	A	•	•	•
Propionaldehyde	C	C	C	A	•	•	•
Propionic acid	B	B	D	A	X	•	•
Propionic anhydride	C	C	D	A	X	•	•
Propionitrile	C	C	C	A	•	•	•
Propyl acetate	C	C	C	A	•	•	•
Propyl alcohol	A	A	A	A	•	•	•
Propylamine	B	B	D	A	•	•	•
Propylene (tetramer & trimer)	C	C	C	A	X	•	•
Propylene dimer	C	C	C	A	•	•	•
Propylene glycol	A	A	A	A	•	•	•
Propylene glycol monoethyl ether	B	B	B	A	•	•	•
Propylene glycol monomethyl ether	B	B	B	A	•	•	•
Propylene oxide (dedicated hose)	B	B	D	A	•	•	•
Prussic acid	A	A	D	A	X	•	•
Pyridine	B	B	D	A	•	•	X
Pyrosulphuric acid	D	D	D	A	X	•	X
Rosin	C	C	C	A	•	•	•
Rosin soap solution (disproportionated)	C	C	C	A	•	•	•
Salt solutions (excluding halides)	A	B	D	A	•	•	•
Sea water	A	D	D	A	X	•	•
Sewage	B	B	D	A	•	•	•
Shellac	B	B	D	A	X	•	•
Silicon oil	A	A	A	A	•	•	•
Silver halides (saturated)	A	D	D	D	X	X	•
Silver salts (excluding halides - saturated)	A	B	D	A	•	•	•
Soap solutions	A	A	B	A	•	•	X
Sodium borohydride/sodium hydroxide solution (15% or less sodium hydroxide)	C	C	D	A	•	•	•
Sodium chlorate solution (50% or less)	A	A	D	A	X	•	•
Sodium chloride (saturated)	A	B	D	A	X	•	•
Sodium chromate	B	B	B	A	•	•	•
Sodium dichromate solution (70% or less)	C	C	D	A	X	•	•
Sodium Hexachlorate	Consult Engineering						
Sodium hydrosulphide solution (45% or less)	A	B	D	A	•	•	•
Sodium hydrosulphidelammonium sulphide solution	C	C	D	A	X	•	•
Sodium hypochlorite (<15%)	C	C	D	A	X	•	•
Sodium hydroxide solution	A	A	C	A	•	•	•
Sodium salts (excluding halides - saturated)	A	B	D	A	•	•	•
Stannous, stannic salts (excluding halides)	A	B	D	A	•	•	•
Starch (aqueous)	A	A	B	A	•	•	•
Styrene monomer	B	B	B	A	•	•	•
Sugar syrup	A	A	A	A	•	•	•
Sulphamic acid	A	A	D	A	X	•	•
Sulpholane	D	D	D	D	X	X	X
Sulphonyl chloride	D	D	D	D	X	X	X
Sulphur (molten)	D	D	D	X	X	X	X
Sulphur chloride	D	D	D	D	X	X	X

Chemical	Hose				Fittings		
	1	2	3	4	CS	SS	PP
Sulphur dioxide	C	C	D	A	X	•	•
Sulphuric acid (<20%)	B	B	D	A	•	•	•
Sulphuric acid (20%-85%)	B	D	D	D	X	X	•
Sulphuric acid (>85%)	C	C	D	A	•	•	•
Sulphuric acid (fuming - see Oleum)							
Sulphuric acid (spent)	C	C	D	A	X	•	•
Sulphurous acid	B	B	D	A	•	•	•
Sulphuryl chloride	D	D	D	D	X	X	X
TAE (See Tertiary amyl ethyl ether)	C	C	C	A	•	•	•
Tall oil (crude and distilled)	A	A	A	A	•	•	•
Tall oil fatty acid (<20% resin acids)	C	C	C	A	X	•	•
Tallow	A	A	A	A	•	•	•
TAME (See Tertiary amyl methyl ether)							•
Tannic acid (<10%)	A	A	D	A	X	•	•
Tartaric acid	A	B	D	A	X	•	X
Tertiary amyl ethyl ether (TAE)	C	C	C	A	•	•	•
Tertiary amyl methyl ether (TAME)	C	C	C	A	•	•	•
Tetrachloroethane	C	C	C	A	•	•	•
Tetrachloroethylene	C	C	C	A	•	•	•
Tetraethylene glycol	B	B	B	A	•	•	•
Tetraethylene pentamine	C	C	D	A	•	•	•
Tetrahydrofuran	C	C	C	A	•	•	X
Tetrahydronaphthalene	C	C	C	A	•	•	X
Thionyl chloride	D	D	D	D	X	X	X
Tin halides	A	D	D	D	X	X	•
Tin salts (excluding halides - saturated)	A	B	D	A	•	•	•
Titanium tetrachloride	C	D	D	D	X	X	•
Toluene	C	C	C	A	•	•	X
Toluene diamine	D	D	D	D	X	X	•
Toluene diisocyanate	B	B	B	A	•	•	X
o-Toluidine	B	B	C	A	•	•	•
Transformer oil	B	B	B	A	•	•	•
Transmission oil	B	B	B	A	•	•	•
Tributylamine	B	B	B	A	•	•	•
Tributyl phosphate	B	B	B	A	•	•	•
Trichloroacetic acid (10% or less)	A	B	D	D	X	X	•
1,2,4-Trichlorobenzene	C	C	C	A	•	•	•
1, 1, 2-Trichloroethane	C	C	C	A	•	•	•
1, 1, 1-Trichloroethane	C	C	C	A	•	•	•
Trichloroethylene	C	C	C	A	•	•	•
Trichloropropane	C	C	C	A	•	•	•
1, 1, 2-Trichloro-1, 2, 2-trifluoroethane	D	D	D	D	X	X	X
Tricresyl phosphate (<1% ortho isomer)	B	B	B	A	•	•	•
Tridecanol	B	B	B	A	•	•	•
Triethanolamine	B	B	D	A	•	•	•
Triethylamine	B	B	D	A	•	•	•
Triethylbenzene	B	B	B	A	•	•	•
Triethylene glycol	A	A	A	A	•	•	•
Triethylene tetramine	B	B	D	A	•	•	•
Triethyl phosphite	C	C	D	A	X	•	•
Triisopropanolamine	B	B	D	A	•	•	•
Trimethyl acetic acid	A	A	D	A	•	•	•
1,2,4-Trimethylbenzene	B	B	B	A	•	•	•
Trimethylhexamethylene diamine (2, 2, 4- & 2, 4, 4-isomers)	C	C	D	A	•	•	•
Trimethylhexamethylene diisocyanate (2, 2, 4- & 2, 4, 4-isomers)	C	C	C	A	•	•	•
2, 2, 4-Trimethyl-1, 3-pentanediol-1-isobutyrate	C	C	C	A	•	•	•
Trimethyl phosphite	C	C	C	A	•	•	•
Trioctyl phosphate	B	B	B	A	•	•	•

Chemical	Hose				Fittings		
	1	2	3	4	CS	SS	PP
Tripropylene glycol	A	A	A	A	•	•	•
Tripropylene glycol monomethyl ether	C	C	C	A	•	•	•
Trityl phosphate	B	B	B	A	•	•	•
Trixylenyl phosphate	B	B	B	A	•	•	•
Tung Oil	B	B	B	A	x	•	•
Turpentine	C	C	C	A	•	•	•
1-Undecene	C	C	C	A	•	•	•
Undecyl acid	C	C	C	A	•	•	•
Urea (aqueous)	A	B	B	A	•	•	•
Urea/ammonia salt solutions	A	B	B	A	•	•	•
Urea/ammonia solutions	A	B	B	A	•	•	•
n-Valeraldehyde	C	C	C	A	•	•	•
Varsol	A	A	A	A	•	•	•
Vaseline	A	A	A	A	•	•	•
Vegetable oils	A	A	A	A	•	•	•
Vinegar	A	A	D	A	X	•	•
Vinyl acetate	B	B	C	A	•	•	•
Vinyl chloride monomer (VCM)	Use Cryoflex 50		D	D	D	X	X
Vinyl ethyl ether	C	C	C	A	•	•	•
Vinylidene chloride	C	C	C	A	•	•	•
Vinyl neodecanoate	C	C	C	A	•	•	•
Vinyl toluene	B	B	C	A	•	•	•
Water	A	A	A	A	•	•	•
White spirit (low aromatic 15% - 20%)	B	B	B	A	•	•	•
Wine	B	B	D	A	X	•	•
Xylene	C	C	C	A	•	•	•
Xylenols	B	B	B	A	•	•	•
Yeast (aqueous)	A	A	D	A	X	•	•
Zinc halides	A	D	D	D	X	X	•
Zinc salts (excluding halides - aqueous)	A	B	D	A	•	•	•

NOTES

NOTES


# UNITED FLEXIBLE

## United Flexible, Inc.

815 Forestwood Drive  
Romeoville, IL 60446, USA  
T: +1 815-886-1140  
F: +1 815-886-4550

## Global Leader of Flexible Hose and Assemblies


### Metal

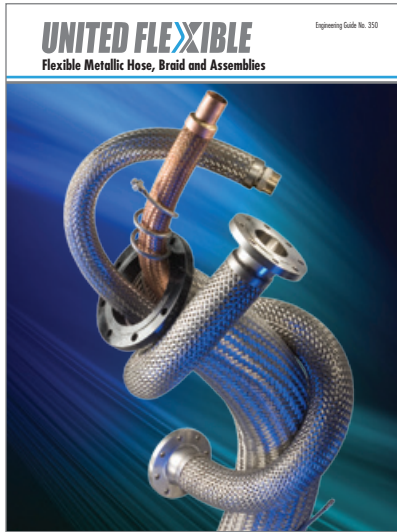

### Fluoropolymer



### Composite

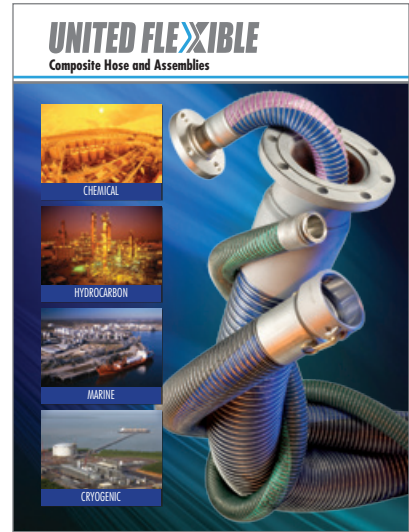

## Global Operations and Technical Support Centers

e-mail: [info@unitedflexible.com](mailto:info@unitedflexible.com)

### US Hose Corp.

815 Forestwood Drive  
Romeoville, IL 60446, USA  
T: +1 815-886-1140  
F: +1 815-886-4550

### AmniTec Limited

Abercarnaid, Merthyr Tydfil  
United Kingdom CF48 1UX  
T: +44 (0) 1685-354222  
F: +44 (0) 1685-389683

### US Hose Corp.

2020 Greens Road, Suite 400  
Houston, TX 77032, USA  
T: +1 281-458-0400  
F: +1 281-458-7809

### AmniTec B.V

Abraham van Stolkweg 118  
3041 JA Rotterdam, The Netherlands  
T: +31 (0) 10 298 2121  
F: +31 (0) 10 2982128

### Fulton Bellows, LLC

2801 Red Dog Lane  
Knoxville, TN 37914  
T: +1 865-546-0550  
F: +1 865-544-5125

### Habia Teknofluor AB

SE-741 80 Knivsta, Sweden  
T: 46 (0) 18 34 75 00

[www.unitedflexible.com](http://www.unitedflexible.com)